DOI: 10.1111/cgf.14777 EUROGRAPHICS 2023 A. Bousseau and C. Theobalt (Guest Editors)

COMPUTER GRAPHICS forum Volume 42 (2023), Number 2 STAR – State of The Art Report

A Survey on Discrete Laplacians for General Polygonal Meshes

A. Bunge¹

M. Botsch¹

Computer Graphics Group, TU Dortmund

Abstract

The Laplace Beltrami operator is one of the essential tools in geometric processing. It allows us to solve numerous partial differential equations on discrete surface meshes, which is a fundamental building block in many computer graphics applications. Discrete Laplacians are typically limited to standard elements like triangles or quadrilaterals, which severely constrains the tessellation of the mesh. But in recent years, several approaches were able to generalize the Laplace Beltrami and its closely related gradient and divergence operators to more general meshes. This allows artists and engineers to work with a wider range of elements which are sometimes required and beneficial in their field. This paper discusses the different constructions of these three ubiquitous differential operators on arbitrary polygons and analyzes their individual advantages and properties in common computer graphics applications.

1. Introdution

The discrete Laplace-Beltrami operator, or Laplacian for short, is a ubiquitous tool in geometry processing. It allows us to solve numerous partial differential equations on discrete surface and volume meshes, which is essential for various computer graphics applications, like mesh smoothing, mesh parameterization or fairing, followed by many others. Especially under the assumption of a triangulated surface is the discrete Laplacian based on the cotangent formula [PP93,MDSB03,DMSB99,Dzi88] almost exclusively used and nearly omnipresent in graphics and geometry processing.

However, due to the growing needs in modeling and engineering applications, recent papers point out that the restriction to triangles or tetrahedral meshes, while simple and convenient, is no longer sufficient. Many users have to fall back to more general shapes to be able to express geometric properties and features in their model. Applications benefiting from a more flexible range of elements are for example fracture modeling [TS08, Bis09, OSTLY12] or linear elasticity problems [TS06]. Additionally, since micro-structures of naturally occurring materials like bones can be described through polygonal domains, generalized differential operators are useful tools for the solid- and bio-mechanics community [TS06]. Furthermore, quad meshes are predominantly used by modeling artists.

In order to enable this flexibility, several papers within the graphics community developed strategies to generalize the Laplace-Beltrami operator to general polygon meshes. This entails several challenges, for example, arbitrary polygons are not necessarily planar which leads to twisted surfaces in 3D. Coming from various backgrounds and inspirations, all presented Laplacians deal with these difficulties in their own way, but it is not necessarily clear in which aspects the operators actually differ and what their various nuances imply. This survey therefore intends to showcase occurring

similarities between the presented methods that may not be apparent if considered individually. In order to achieve this, we summarize existing state of the art approaches that extend the Laplace operator to arbitrary polygon meshes and, if possible, to volumetric polyhedral meshes.

In the smooth setting the Laplacian of a function f is defined as

$$\Delta f = \operatorname{div} \nabla f. \tag{1}$$

Given their close relation, comparing suitable generalizations for discrete gradient and divergence is an almost equally essential affair focused on in this survey. In general, the papers we are going to discuss have all been inspired by different well known numerical schemes commonly used for various discretization problems. Namely the Finite Element Method (FEM), the Mimetic Finite Difference Method (MFD) and the Finite Volume Method (FV). Since all generalized Laplacians can be loosely sorted into one of these schemes, we will briefly explain their core principles at the beginning of each section and highlight the inspirational elements that influenced the respective papers. First, we will repeat necessary definitions required for the operator's construction, followed by the more detailed explanations of the involved polygonal operators and their different ideas, including possible volumetric extensions. Afterwards, we will discuss the required properties a discrete Laplacian should fulfill based on the work presented by Wardetzky et al. [WMKG07] and will analyze the respective operators in this context. Furthermore, the operators are evaluated in a variety of quantitative comparisons that address reoccurring debates within the original papers. The source code for the individual operators and experiments can be found under the following link https://github.com/mbotsch/polyLaplace to enable researchers to experiment with the different discretizations. In the



 $[\]hbox{@ }2023$ The Authors, Computer Graphics Forum published by Eurographics - The European Association for Computer Graphics and John Wiley & Sons Ltd.

This is an open access article under the terms of the Creative Commons Attribution-NonCommercial License, which permits use, distribution and reproduction in any medium, provided the original work is properly cited and is not used for commercial purposes.

end, this survey paper intends to provide the reader with an intuition to choose the optimal polygon Laplacian for their given situation.

2. Basic definitions

Consider a 2D polygon mesh $\mathcal{M} = (\mathcal{V}, \mathcal{E}, \mathcal{F})$ embedded in 3D, with vertices V, edges \mathcal{E} and faces \mathcal{F} . Each vertex $v_i \in V$ has an associated 3D position $\mathbf{x}_i = (x_i, y_i, z_i)$ and each face f consists of n_f vertices. We define an additional set of oriented halfedges \mathcal{H} , where for each inner edge $e \in \mathcal{E}$ exist two oppositely oriented halfedges, while each boundary edge has only one. Likewise, a 3D polyhedral mesh has the same structure with only one additional set consisting of the volumetric cells C.

Furthermore, we define a discrete Laplace operator $\mathbb{L} \in$ $\mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$ as the product of the inverse of a so-called *mass matrix* $\mathbf{M} \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$ and *stiffness matrix* $\mathbf{L} \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$:

$$\mathbb{L} = \mathbf{M}^{-1} \mathbf{L}. \tag{2}$$

 $\mathbb L$ is generally referred to as the strong form of the Laplacian and $\mathbf L$ is its integrated weak form. The exact conditions that are generally imposed on these matrices will be discussed in the next section. As for their construction, most of the upcoming methods focus on a local approach that builds the required matrices per face or cell. We therefore define:

- The matrix $\mathbf{X} \in \mathbb{R}^{|\mathcal{V}| \times 3}$ encodes the vertex positions of the mesh
- $\mathbf{X}_f = (\mathbf{x}_1^f, \dots, \mathbf{x}_{n_f}^f)^\mathsf{T}$ is the $n_f \times 3$ matrix containing in its rows the cyclically ordered vertex positions \mathbf{x}_{i}^{f} of the face f.
- E_f = (e₁^f,...,e_{n_f}^f)^T is the n_f × 3 matrix containing in its rows the cyclically ordered edge vectors e_i^f = x_{i+1}^f x_i^f of the face f.
 B_f = (b₁^f,...,b_{n_f}^f)^T is the n_f × 3 matrix containing in its rows
- the barycenters $\mathbf{b}_{i}^{f} = \frac{1}{2} \left(\mathbf{x}_{i+1}^{f} + \mathbf{x}_{i}^{f} \right)$ of each edge \mathbf{e}_{i}^{f} .

2.1. Properties of a Discrete General Laplace Operator

The smooth Laplace-Beltrami operator has a set of key structural properties that each discretization must be able to fulfill. The correlation between these smooth properties and discrete Laplace operators has been discussed intensively for triangle meshes by Wardetzky et al. [WMKG07] and for tetrahedral meshes by Alexa et al. [AHKSH20]. However, these requirements equally hold for general polygon and polyhedral meshes and are therefore important criteria for the numerical quality of a discrete Laplacian. Unfortunately, as pointed out by Wardetzky et al., most meshes do not allow for Laplacians to satisfy all discrete properties simultaneously, which coins the second part of their paper "No free lunch". In this section, we will reintroduce the individual definitions presented by [WMKG07] in order to establish characteristics by which the quality of each presented polygon Laplacian operator can be assessed.

In the smooth setting, consider a single connected manifold Ω , possibly with boundary, that is equipped with a Riemannian metric. We define a function $u: \Omega \to \mathbb{R}$ and its discrete equivalent $\mathbf{u} \in \mathbb{R}^{|\mathcal{V}|}$, whose entries are the function values of u sampled at the vertices of the surface mesh \mathcal{M} . The strong Laplacian $\mathbb{L} \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$ defined on \mathcal{M} is given through a chosen $|\mathcal{V}| \times |\mathcal{V}|$ matrix pair (\mathbf{M}, \mathbf{L}) consisting of a sparse symmetric mass matrix M and the weak form of the Laplacian given by the sparse matrix L.

Symmetry. Given two functions u and v that are sufficiently smooth and vanish along the boundary of Ω , the smooth Laplacian is selfadjoint with respect to the L^2 inner product of these functions, meaning

$$\langle \Delta u, v \rangle = \langle u, \Delta v \rangle \tag{3}$$

with $\langle u, v \rangle = \int_{\Omega} uv \, dA$. We therefore request the strong form \mathbb{L} to be a self adjoint operator with respect to the inner product induced by the symmetric mass matrix M, meaning

$$(\mathbb{L}\mathbf{u})^{\mathsf{T}}\mathbf{M}\mathbf{v} = \mathbf{u}^{\mathsf{T}}\mathbf{M}(\mathbb{L}\mathbf{v}) \tag{4}$$

$$\Leftrightarrow \mathbf{u}^{\mathsf{T}} \mathbf{L}^{\mathsf{T}} \mathbf{v} = \mathbf{u}^{\mathsf{T}} \mathbf{L} \mathbf{v} \tag{5}$$

for any u and v.

Locality. The smooth Laplacian of a function u at a point \mathbf{p} should only depend on the values $u(\mathbf{q})$ of other points \mathbf{q} in an ε -ball around p. This means that the discrete Laplacian should also operate locally in the 1-ring neighborhood of the respective vertex and should not be affected by distant vertices in the mesh.

Linear Precision. In the smooth setting, given a linear function u defined on Ω , the Laplacian of said function has to be zero in planar regions of the manifold. The discrete equivalent is similar: Given a planar mesh \mathcal{M} and any linear function u, we require the strong version of the Laplacian L to satisfy

$$(\mathbb{L}\mathbf{u})_i = 0 \tag{6}$$

for each inner vertex v_i , where $(\cdot)_i$ denotes the *i*-th entry or row of the vector or matrix within the parenthesis. Alternatively, we can omit the influence of the mass matrix and require the stiffness matrix to satisfy

$$(\mathbf{L}\mathbf{X})_i = 0. \tag{7}$$

Positive Semi-Definiteness and Null Space. In the smooth setting, the Dirichlet energy of a function u defined on the manifold Ω has to be greater than or equal zero. The discrete version of the Dirichlet energy can be expressed with the help of the stiffness matrix as

$$\frac{1}{2}\mathbf{u}^{\mathsf{T}}\mathbf{L}\mathbf{u}.\tag{8}$$

Therefore, L has to be positive semi-definite in order for the energy to remain non-negative. Note that, depending on the definition, the Laplacian could alternatively be required to be negative semidefinite. A second aspect of this property addresses the kernel of the Laplacian. The smooth Dirichlet energy vanishes for linear functions and if we consider a closed mesh, linear functions become constant. Therefore the kernel of L has to be one-dimensional as well and can only contain constant functions. If the stiffness matrix can be expressed as

$$(\mathbf{L}\mathbf{u})_i = \sum_j w_{ij}(u_i - u_j),\tag{9}$$

the discrete Laplacian automatically fulfills this property [WMKG07].

Maximum Principle. The smooth maximum principle requires that harmonic functions ($\Delta u = 0$) have no local extremum at interior points of the manifold Ω . For example, this property assures that approximated solutions of diffusion problems flow from regions with higher potential to regions with lower potential, instead of the other way round. The discrete equivalent can be directly addressed through the entries of the stiffness matrix by the so-called positive weight property, which is a sufficient but not necessary condition for the discrete maximum principle. It demands that for each vertex v_i the entries \mathbf{L}_{ii} have to be less than or equal zero if $i \neq j$. Furthermore, at least one entry per row has to be nonzero.

Convergence. The convergence property requires that approximate solutions involving the Laplace operator converge to the exact solution of the PDE under progressive refinement of the mesh, which was analyzed by Hildebrandt et al. [HPW06] and Wardetzky [War08]. This property will not be proven for the upcoming operators, but analyzed empirically in the result section.

3. Cotangent Laplacian on Triangle Meshes

One property shared by almost all of the discussed polygon Laplacians is that they reproduce the standard cotangent stiffness matrix on triangle surface meshes. We will therefore shortly revisit its definition based on the finite element discretization. Given a triangle mesh \mathcal{M} , let $\{\phi_1,\ldots,\phi_{|\mathcal{V}|}\}$ be the piecewise linear Lagrange basis function defined on \mathcal{M} , with

$$\varphi_i(\mathbf{x}_j) = \begin{cases} 1 & \text{if } i = j \\ 0 & \text{otherwise.} \end{cases}$$
(10)

The mass and stiffness matrices $\mathbf{M}, \mathbf{L} \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$ of the Laplace operator are then discretized as

$$\mathbf{M}_{ij} = \int_{\mathcal{M}} \mathbf{\varphi}_i \cdot \mathbf{\varphi}_j = \begin{cases} \frac{|t_{ijk}| + |t_{jih}|}{12} & \text{if } j \in \mathcal{N}(i), \\ \sum_{k \in \mathcal{N}(i)} \mathbf{M}_{ik} & \text{if } j = i, \\ 0 & \text{otherwise,} \end{cases}$$
(11)


and

$$\mathbf{L}_{ij} = \int_{\mathcal{M}} \langle \nabla \varphi_i, \nabla \varphi_j \rangle = \begin{cases} -w_{ij} & \text{if } j \in \mathcal{N}(i), \\ \sum_{k \in \mathcal{N}(i)} w_{ik} & \text{if } j = i, \\ 0 & \text{otherwise,} \end{cases}$$
(12)

with

$$w_{ij} = \frac{\cot \alpha_{ij} + \cot \beta_{ij}}{2}.$$
 (13)

Here t_{ijk} and t_{jih} denote the triangles adjacent to the edge e_{ij} between the vertices (v_i, v_j) , with $|t_{ijk}|, |t_{jih}|$ describing their respective areas (see inset). The angles α_{ij} and β_{ij} lie in the opposite corners of the adjacent triangles and $\mathcal{N}(i)$ denotes the set formed by the vertex indices of the one-ring neighbor-



hood surrounding v_i . Note that in general practice, the cotangent values are not obtained by using the inverse trigonometric function itself, but rather through the respective edge lengths and area value of the involved triangle. Given a triangle t_{ijk} with edge lengths l_{ij}, l_{ik} and l_{jk} respectively, we can compute the cotangent of the corner angle θ_k at vertex ν_k through

$$\cot \theta_k = \frac{l_{jk}^2 + l_{ik}^2 - l_{ij}^2}{4|t_{ijk}|}.$$
 (14)

Therefore, the Laplacian itself can be constructed intrinsically, as described in [Sha21]. Furthermore, emulating the smooth setting with the Laplacian being defined as the divergence of the gradient, one can express the gradient operator as a discrete matrix $\mathbf{G} \in \mathbb{R}^{3|\mathcal{F}| \times |\mathcal{V}|}$ consisting of local sub-matrices $\mathbf{G}_i \in \mathbb{R}^{3 \times 3}$ per triangle $f_i = t_{jkl}$. Each column of G_i is associated with the gradient of one of the respective vertices. For example, the first column referring to vertex v_i , would be

$$\mathbf{G}_{i}(:,1) = \frac{(\mathbf{x}_{l} - \mathbf{x}_{k})^{\perp}}{2|t_{ikl}|}.$$
 (15)

The global matrix G is then assembled by placing the respective face gradients at the column entries of the individual vertices v_i and setting everything else to zero. This can further be used to discretize the divergence as

$$\mathbf{D} = \mathbf{G}^{\mathsf{T}} \hat{\mathbf{M}}.\tag{16}$$

The matrix $\hat{\mathbf{M}} \in \mathbb{R}^{3|\mathcal{F}| \times 3|\mathcal{F}|}$ is defined as a diagonal mass matrix containing the area of the triangle i in the three consecutive diagonal entries associated with face i [BSPG06]. The product of **D** and G gives us the stiffness matrix L, which is therefore consistent with the continuous setting, but requires a concrete embedding of the mesh in contrast to the intrinsic formulation of L itself [Sha21].

3.1. Properties

Symmetry. Considering the individual entries of the stiffness matrix defined in Equation (12), the cotan operator is symmetric by construction.

Positive Semi-Definiteness and Kernel Dimension. Since L can be considered as the Gramian matrix of the gradients of the linear Lagrange basis functions, it is positive semi-definite by construction. Furthermore, given that $\Delta f(\mathbf{x}_i)$ of a function f at vertex v_i can be expressed through the well known cotan formula [Mac49, PP93, DMSB99]

$$\Delta f(\mathbf{x}_i) = \frac{1}{2} \sum_{\nu_j \in \mathcal{N}(\nu_i)} (\cot \alpha_{ij} + \cot \beta_{ij}) (f(\mathbf{x}_j) - f(\mathbf{x}_i)), \quad (17)$$

the operator satisfies the condition given in Equation (9) and therefore has a one dimensional kernel.

Locality. By construction, each row $(L)_i$ associated to vertex v_i has non-zero entries only in the columns associated to nodes in its immediate one-ring neighborhood.

Linear Precision. The area gradient of a triangle t_{ijk} with respect to the vertex v_i can be expressed as

$$\nabla A|_{\mathbf{x}_i} = \frac{\cot \theta_k}{2} (\mathbf{x}_i - \mathbf{x}_j) + \frac{\cot \theta_j}{2} (\mathbf{x}_i - \mathbf{x}_k), \tag{18}$$

with θ_j and θ_k denoting the angles at the respective vertices v_j, v_k and $A = |t_{ijk}|$ the area of the triangle t_{ijk} . The cotan Laplace of the coordinate function \mathbf{x}_i at vertex v_i can therefore be expressed as the sum of positive area gradients of its adjacent triangles [DMSB99], which, given that the triangles all lie within the same plane, becomes zero.

Maximum Principle. This property is in general not satisfied, since the cotangent becomes negative for angles between 90 and 180 degrees, leading to negative entries \mathbf{L}_{ij} in the stiffness matrix if the involved angles satisfy $\alpha_{ij} + \beta_{ij} > \pi$.

Convergence. The convergence behavior of the cotan Laplace was discussed by Hildebrand et al. [HPW06] and Wardetzky [War08]. They point out that pointwise convergence of progressively refined meshes $\mathcal M$ to a smooth surface Ω is not sufficient to guarantee convergence for the cotan Laplace. However, if the meshes converge in Hausdorff distance and are normal graphs over Ω , then the Laplacian converges to its smooth solution.

4. Mimetic Finite Differences

The Mimetic Finite Difference method (MFD) [LMS14] is an approximation strategy whose main goal is to define discrete differential operators that try to preserve, or mimic, certain critical mathematical and physical properties of the underlying PDE. Its core principle lies in the definition of a so-called primary operator, typically gradient, divergence or curl, based on discrete vector and tensor calculus and various forms of Stokes' theorem. The other operators are then derived by using discrete analogs of Green's formulas in order to retain a duality relationship to the primary term. Several papers (e.g. [BLS05,BLSS07]) applied the MFD method to derive mimetic discretizations on polygonal and polyhedral meshes and stressed that one of the key components is the definition of an accurate mimetic inner product. This matrix is a vital part in some derivations of the discrete Laplacian. Although the MFD is not directly focused on the construction of this operator, therefore exceeding the scope of this survey, its theory influenced recent approaches in the graphics community that will be discussed in the following sections. As a disclaimer, some of the upcoming derivations require rather in-depth knowledge and may seem fast paced for readers that are not already familiar with these terms. However, we still chose to include these detailed explanations in the hope that they might provide some useful insights on the differences of the respective mathematical backgrounds that influenced each of the upcoming discrete polygonal Laplacians.

4.1. Mimetic Polygon Laplacian

Alexa and Wardetzky [AW11] rely on an algebraic approach to define their discrete Laplacian and extend the MFD-based inner product stabilization [BLS05] to two-dimensional manifolds that even allow for non-planar polygons. Given a polygon surface mesh \mathcal{M} embedded in 3D, the only restrictions are that it has to be *oriented*, meaning that two adjacent faces have to be oppositely oriented on the shared edge, and that the faces are *simple*, meaning that they are not self-intersecting and have boundaries that form a closed loop.

4.1.1. Algebraic Framework

Let Γ^k , $k \in \{0,1\}$, be the linear function space of discrete k-forms on \mathcal{M} . A k-form can be thought of as a function that takes in k-surfaces and assigns them their integrated value as output, with a 0-surface being a node, a 1-surface an edge, a 2-surface a face and so on. Alexa and Wardetzky derive their polygon Laplacian for 0-forms from the Laplace-de Rahm operator, which for a scalar-valued function u is defined as

$$\Delta u = d^* du. \tag{19}$$

In this context $d:\Gamma^0\to\Gamma^1$ is the exterior derivative and $d^*:\Gamma^1\to\Gamma^0$ the codifferential, which is defined as the adjoint of d with respect to the square integrable inner product [Ros97]. They use the so-called coboundary operator as a discrete version of the smooth exterior derivative, with

$$(du)(h_{ij}) = u(j) - u(i)$$
 (20)

and h_{ij} being the oriented halfedge from vertex v_i to v_j . The definition of a suitable adjoint operator d^* requires inner products on the k-form function spaces and is therefore, in contrast to the exterior derivative, metric dependent. The inner products can be expressed as two symmetric positive definite matrices $\mathbf{M} \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$ and $\mathbf{M}_1 \in \mathbb{R}^{|\mathcal{H}| \times |\mathcal{H}|}$. Any choice of \mathbf{M} and \mathbf{M}_1 gives us an expression for the discrete Laplacian

$$\mathbb{L} = \mathbf{d}^* \mathbf{d} = \mathbf{M}^{-1} \mathbf{L} \tag{21}$$

with

$$\mathbf{L} = \mathbf{d}^{\mathsf{T}} \mathbf{M}_{1} \mathbf{d}. \tag{22}$$

The matrix version of the coboundary operator $\mathbf{d} \in \mathbb{R}^{|\mathcal{H}| \times |\mathcal{V}|}$ is often referred to as the difference operator. Its k-th row associated with the k-th halfedge $h_{ij} \in \mathcal{H}$ can be expressed as

$$\mathbf{d}_{kl} = \begin{cases} -1 & l = i, \\ 1 & l = j, \\ 0 & \text{otherwise,} \end{cases}$$
 (23)

which is only non-zero for the entries \mathbf{d}_{ki} and \mathbf{d}_{kj} associated with the vertices connected by the halfedge.

4.1.2. Choice Of Inner Product Matrices

Although in theory any choice for the two inner product matrices would be feasible, not all of them yield the same quality of results. Alexa and Wardetzky therefore motivate their chosen construction by fulfilling the desired criteria discussed in Section 2.1. The inner product matrix for 0-forms assigns each vertex a certain mass. In order to retain locality, the matrix **M** is given by

$$\mathbf{M}_{ii} = \sum_{f \ni \nu_i} \frac{|f|}{n_f},\tag{24}$$

where |f| denotes the magnitude of the polygons' vector area. As already mentioned, we also consider non-planar polygons in \mathbb{R}^3 that do not necessarily define a surface. Therefore, |f| is defined as the area of the largest orthogonal projection of the polygon onto a plane and can be computed as the norm of the Darboux vector $\mathbf{a}_f \in \mathbb{R}^3$ of the skew symmetric (3×3) matrix

$$\mathbf{A}_f = \mathbf{E}_f^\mathsf{T} \mathbf{B}_f, \tag{25}$$

meaning

$$|f| = \left\| \mathbf{a}_f \right\| = \left\| \frac{1}{2} \sum_{\nu_i \in f} \mathbf{x}_i \times \mathbf{x}_{i+1} \right\|. \tag{26}$$

The cyclic vertex positions $(\mathbf{x}_i, \mathbf{x}_{i+1})$ depend on the orientation of the face, which is encoded in the previously defined matrix \mathbf{X}_f . It makes sense to look at the definition of the inner product for 1-forms from a local perspective per face and then later assemble the individual matrices into the global representation, since the process can be repeated per element $f \in \mathcal{F}$. The starting point for the construction is the matrix $\tilde{\mathbf{M}}_f \in \mathbb{R}^{n_f \times n_f}$ given by

$$\tilde{\mathbf{M}}_f = \frac{1}{|f|} \mathbf{B}_f \mathbf{B}_f^\mathsf{T},\tag{27}$$

which was previously defined by Brezzi et al. [BLS05] and is motivated by the Laplacian's connection to mean curvatures. However, while this choice of inner product matrix is generally positive semi-definite, in order for the Laplacian itself to fulfill this property, which is a desired criterion, the inner products have to be *positive* definite. Alexa and Wardetzky therefore add a stabilization term to extend Brezzi et al.'s definition to non-planar polygons and give rise to a positive definite inner product. The necessity stems from the fact that for general polygons with n_f vertices the transposed midpoint matrix \mathbf{B}_f will have either rank 2 (planar) or 3 (non-planar), allowing for a kernel of dimension $n_f - \text{rank}(\mathbf{B}_f)$. Therefore, in order to fill up the kernel, Alexa and Wardetzky introduce the alternative inner product matrix

$$\mathbf{M}_f := \tilde{\mathbf{M}}_f + \mathbf{C}_{\bar{f}} \mathbf{U}_{\bar{f}} \mathbf{C}_{\bar{f}}^{\mathsf{T}}. \tag{28}$$

Here, \bar{f} is the maximum orthogonal projection of the polygon f and $\mathbf{C}_{\bar{f}} \in \mathbb{R}^{n_f \times (n_f - 2)}$ is a matrix whose columns span the kernel of $\mathbf{E}_{\bar{f}}^{\mathsf{T}}$. Combined with any choice of a symmetric positive definite matrix $\mathbf{U}_{\bar{f}} \in \mathbb{R}^{n_f \times n_f}$, the stabilization term will lead to a positive definite inner product \mathbf{M}_f , as proven in Theorem 1 of the original paper. That $\mathbf{C}_{\bar{f}}$ only has to span the kernel of $\mathbf{E}_{\bar{f}}^{\mathsf{T}}$ is motivated by the linear precision property. In order for $(\mathbf{L}\mathbf{X})_i$ to vanish in a planar region surrounding vertex v_i , the stabilization term must also vanish. But since $\mathbf{E}_f = \mathbf{E}_{\bar{f}}$ for planar polygons, we get

$$\left(\mathbf{C}_{f}^{\mathsf{T}}\mathbf{d}_{f}\mathbf{X}_{f}\right)_{i} = \left(\mathbf{C}_{f}^{\mathsf{T}}\mathbf{E}_{f}\right)_{i} = \left(\mathbf{C}_{f}^{\mathsf{T}}\mathbf{E}_{\bar{f}}\right)_{i} \stackrel{!}{=} 0,\tag{29}$$

which is equivalent to

$$\left(\mathbf{E}_{\bar{f}}^{\mathsf{T}}\mathbf{C}_{f}\right)_{i} \stackrel{!}{=} 0. \tag{30}$$

Here, \mathbf{d}_f refers to the local difference operator defined on the face f. Since all other properties are already accounted for, it is sufficient to require that \mathbf{C}_f spans the kernel of $\mathbf{E}_{\bar{f}}^{\mathbf{T}}$. As for inner products in general, there are several choices for $\mathbf{C}_{\bar{f}}$ and $\mathbf{U}_{\bar{f}}$ that would satisfy the conditions, giving rise to a whole family of suitable matrices. However, Alexa and Wardetzky propose a special combination in order to achieve scale invariance as a property for the final Laplacian, meaning that the stiffness matrix \mathbf{L} remains unchanged when the mesh is uniformly scaled. Using a parameter $0 < \lambda \in \mathbb{R}$, they choose the matrix $\mathbf{U}_{\bar{f}}$ as

$$\mathbf{U}_{\bar{f}} := \lambda \mathbf{I}_f, \tag{31}$$

with \mathbf{I}_f being the n_f -dimensional identity matrix. They choose \mathbf{C}_f such that its columns are orthonormal, and the final inner product leads to a per-face Laplacian stiffness matrix

$$\mathbf{L}_f = \mathbf{d}_f^{\mathsf{T}} \mathbf{M}_f \mathbf{d}_f \tag{32}$$

that is not affected by scaling, is local and linearly precise. These local matrices are then assembled into the global stiffness matrix \mathbf{L} by assigning each vertex v_i the i-th row and column of \mathbf{L} in which the sum over their respective entries in the local matrices are collected.

4.2. Geometric Polygon Laplacian

Alexa and Wardetzky's focus lies solely on the definition of the Laplace-Beltrami and did not further investigate other operators. This was later addressed by de Goes et al. [dGBD20], who defined a variety of discrete differential polygon operators that also serve as a generalization of the MFD, but with a stabilization term for the inner product matrix on 1-forms inspired by the virtual element method (VEM) [BdVBM13]. The following chapter will further elaborate on their approach. The main focus of de Goes et al. [dGBD20] was a new linearly precise discretization of the gradient, which allows to define a consistent set of operators, including their own interpretation of the Laplacian.

4.2.1. Polygon Gradient

As in the previous section, the definition of the gradient will be applied locally per polygon $f \in \mathcal{F}$, but can be assembled into a global gradient matrix acting on the complete mesh. Given a scalar function u defined on f, we want to find a matrix \mathbf{G}_f that simulates the behavior of the gradient ∇u on the polygon. For planar elements, this would normally be achieved by applying Stokes' theorem to ∇u and deriving a matrix discretization through the weak form of the resulting boundary integral. However, since the polygons of the given mesh are not necessarily planar it is not clear how to define the surface normal $\mathbf{n}(\mathbf{x})$ at the boundary points \mathbf{x} . Therefore, the standard approach cannot be used. De Goes et al. [dGBD20] circumvent this problem by evaluating the co-gradient operator

$$\nabla u^{\perp}(\mathbf{x}) := \mathbf{n}(\mathbf{x}) \times \nabla u(\mathbf{x}), \tag{33}$$

on which applying Stoke's theorem leads to

$$\iint_{f} \nabla u^{\perp}(\mathbf{x}) \, \mathrm{d}A = \oint_{\partial f} u(\mathbf{x}) \mathbf{t}(\mathbf{x}) \, \mathrm{d}\mathbf{x},\tag{34}$$

with $\mathbf{t}(\mathbf{x})$ being the unit tangent vector at boundary point \mathbf{x} . This expression is independent of the surface of the polygon and only requires the tangent vectors along the boundary, which are uniquely defined. For example, if we consider the boundary integral in Equation (34) for linear functions u, the integrated co-gradient can be evaluated exactly as a sum over the averaged function values along the polygon edges, multiplied with the respective edge vector:

$$\oint_{\partial f} u(\mathbf{x}) \mathbf{t}(\mathbf{x}) \, d\mathbf{x} = \mathbf{E}_f^\mathsf{T} \mathbf{A} \mathbf{v} \mathbf{g}_f \mathbf{u}_f.$$
(35)

© 2023 The Authors.

Here $\mathbf{Avg}_f \in \mathbb{R}^{n_f \times n_f}$ is a matrix that yields the average of consecutive vector entries, defined as

$$\left(\mathbf{Avg}_f\right)_{ij} = \begin{cases} \frac{1}{2} & \text{for } j = i\\ \frac{1}{2} & \text{for } j = (i+1) \bmod n_f \\ 0 & \text{otherwise.} \end{cases}$$
 (36)

Additionally, in order to describe the co-gradient as matrix-vector multiplication, one can define the cross product as a map from a 3D vector $\mathbf{p} = (p_1, p_2, p_3)^\mathsf{T}$ to a skew symmetric matrix $[\mathbf{p}] \in \mathbb{R}^{3 \times 3}$ with

$$[\mathbf{p}] = \begin{pmatrix} 0 & -p_3 & p_2 \\ p_3 & 0 & -p_1 \\ -p_2 & p_1 & 0 \end{pmatrix}, \tag{37}$$

such that $[\mathbf{p}]\mathbf{q} = \mathbf{p} \times \mathbf{q}$ for $\mathbf{q} \in \mathbb{R}^3$. If we consider $u : \mathbb{R}^3 \to \mathbb{R}$ to be a linear function, meaning $u(\mathbf{x}) = \mathbf{s}^\mathsf{T} \mathbf{x} + r$ with $\mathbf{s}, \mathbf{x} \in \mathbb{R}^3$ and $r \in \mathbb{R}$, its co-gradient would yield $\mathbf{n}(\mathbf{x}) \times \mathbf{s}$, which can then be expressed as $[\mathbf{n}(\mathbf{x})]\mathbf{s}$. This becomes useful if we consider

$$\iint_{f} \nabla u^{\perp}(\mathbf{x}) \, d\mathbf{x} = \oint_{\partial f} \left(\mathbf{s}^{\mathsf{T}} \mathbf{x} + r \right) \mathbf{t}(\mathbf{x}) \, d\mathbf{x}$$
 (38)

$$= \mathbf{E}_f^\mathsf{T} \mathbf{A} \mathbf{v} \mathbf{g}_f \left(\mathbf{X}_f \mathbf{s} + \mathbf{1}_f r \right) \tag{39}$$

$$= \mathbf{E}_f^{\mathsf{T}} \mathbf{B}_f \mathbf{s}, \tag{40}$$

which equally gives

$$\mathbf{E}_{f}^{\mathsf{T}}\mathbf{B}_{f}\mathbf{s} = \left(\iint_{f} [\mathbf{n}(\mathbf{x})] \, \mathrm{d}\mathbf{x}\right) \mathbf{s},\tag{41}$$

since the term $\mathbf{E}_f^\mathsf{T} \mathbf{A} \mathbf{v} \mathbf{g}_f \mathbf{1}_f = \mathbf{E}_f^\mathsf{T} \mathbf{1}_f$, which is the sum of edge vectors and therefore zero. Equation (41) implies that the surface integral of the matrix $[\mathbf{n}(\mathbf{x})]$ is equal to the previously mentioned area matrix \mathbf{A}_f (see Equation (25)) related to the largest orthogonal projection of the face f and independent of the polygons' interpolated surface. Therefore, replacing the normal term $\mathbf{n}(\mathbf{x})$ with the constant face normal of the planar projection \bar{f} , given by

$$\mathbf{n}_f = \frac{\mathbf{a}_f}{|f|},\tag{42}$$

the surface integral of the co-gradient can be changed to

$$\iint_{f} [\mathbf{n}_{f}] \nabla u(\mathbf{x}) \, \mathrm{d}\mathbf{x}. \tag{43}$$

Considering that the co-gradient ∇u^{\perp} can now be interpreted as a local 90 degrees rotation of the gradient around the normal \mathbf{n}_f , one can apply a second rotation around the same normal to obtain $-\nabla u$. This leads to de Goes et al.'s definition of the the gradient matrix

$$\mathbf{G}_f = -\frac{1}{|f|}[\mathbf{n}_f]\mathbf{E}_f^\mathsf{T}\mathbf{A}\mathbf{v}\mathbf{g}_f \tag{44}$$

per polygon f, which is proven to be linearly precise. As for the stiffness matrix, the local gradient operators can be assembled into a global gradient operator per mesh $\mathbf{G} \in \mathbb{R}^{3|\mathcal{F}|\times|\mathcal{V}|}$.

4.2.2. Flat, Sharp And Projection Operator

Based on their definition of the gradient operator, de Goes et al. derive an alternative expression to Alexa's and Wardetzky's choice for the inner product matrix on 1-forms. Involved in the process are their discrete polygon extensions of the so-called *sharp* \sharp and *flat* \flat operators, both discretized as

$$\mathbf{V}_{f}^{\sharp} := \frac{1}{|f|} [\mathbf{n}_{f}] \left(\mathbf{B}_{f}^{\mathsf{T}} - \mathbf{c}_{f} \mathbf{1}_{f}^{\mathsf{T}} \right) \in \mathbb{R}^{3 \times n_{f}}, \tag{45}$$

and

$$\mathbf{V}_f^{\flat} := \mathbf{E}_f \left(\mathbf{I} - \mathbf{n}_f \mathbf{n}_f^{\mathsf{T}} \right) \in \mathbb{R}^{n_f \times 3} \tag{46}$$

respectively, with \mathbf{c}_f being the face centroid and $\mathbf{1}_f \in \mathbb{R}^{n_f}$ a vector with only ones as entries. As pointed out in Lemma 2 of the original paper, this expression for the sharp operator yields

$$\mathbf{G}_f \mathbf{u}_f = \mathbf{V}_f^{\sharp} \mathbf{d}_f \mathbf{u}_f, \tag{47}$$

for any scalar function \mathbf{u}_f and is therefore able to reproduce a discrete version of the smooth relation $\nabla u = (\mathrm{d} u)^\sharp$ between sharp and gradient operator. In the continuous setting, given a vector space V equipped with an inner product $\langle \cdot, \cdot \rangle$ represented by a matrix \mathbf{K} :

$$\langle \mathbf{x}, \mathbf{y} \rangle = \mathbf{x}^\mathsf{T} \mathbf{K} \, \mathbf{y} \quad \forall \, \mathbf{x}, \mathbf{y} \in V,$$
 (48)

the flat operator b is defined as

$$\mathbf{v}^{\flat}(\mathbf{u}) = \langle \mathbf{v}, \mathbf{u} \rangle = \mathbf{v}^{\mathsf{T}} \mathbf{K} \, \mathbf{u}, \tag{49}$$

mapping a vector v from the vector space V to a functional $g(\mathbf{u}) =$ $\langle \mathbf{v}, \mathbf{u} \rangle$ in its dual space V^* [Lee97]. The flat and sharp operators form an isomorphism and we know from the previous assumption that for each linear functional $g \in \mathcal{V}^*$ there exists a unique $\mathbf{v} \in V$ such that $g(\mathbf{u}) = \langle \mathbf{v}, \mathbf{u} \rangle$ for all $\mathbf{u} \in V$. Therefore, the sharp operator \sharp forms the inverse of \flat and can be considered as $g^{\sharp} = \mathbf{v}$. This is commonly referred to as lowering or raising an index. In de Goes' setting, the matrix V^{\flat} maps a 3D vector to its tangential part and then computes its counter-clockwise circulation along the edges of the polygon, giving us a discrete 1-form. The sharp operator \mathbf{V}^{\sharp} inversely maps the values of a discrete 1-form defined on the polygon back to a single tangent vector per face. However, in contrast to the continuous setting, the operators defined by de Goes et al. are not the exact inverses of each other. The definition holds for any vector $\mathbf{v} \in \mathbb{R}^3$ that satisfies $\mathbf{v}^\mathsf{T} \mathbf{n}_f = 0$, meaning it is tangent to the polygon. If this vector is flattened to a 1-form and then inversely sharpened back, it regains its original form. However, first applying the sharpening operator and then lowering the resulting tangent vector back to its 1-form does not have the same effect due to the rank deficiency of \mathbf{V}_f^{\sharp} . It reduces the n_f values of a discrete 1-form to only a tangent vector on the polygon f [dGBD20] and therefore loses information. Inspired by the virtual element method [BdVBM13], they mitigate the effect by defining a so-called projection operator

$$\mathbf{P}_f := \mathbf{I}_f - \mathbf{V}_f^{\flat} \mathbf{V}_f^{\sharp} \quad \in \mathbb{R}^{n_f \times n_f}$$
 (50)

that measures the error of \mathbf{V}_f^{\flat} and \mathbf{V}_f^{\sharp} being inverse to each other. Basically, by first sharpening a 1-form g to a tangent vector that is then flattened back to a representative 1-form \hat{g} , the projection operator eliminates the components of g that would result in a tangent vector after applying \mathbf{V}_f^{\flat} .

4.2.3. Stiffness Matrix

Equipped with the previously defined operators, de Goes et al. [dGBD20] define their local inner product matrices acting on 1-forms as

$$\mathbf{M}_{f} := |f| \mathbf{V}_{f}^{\sharp \mathsf{T}} \mathbf{V}_{f}^{\sharp} + \lambda \, \mathbf{P}_{f}^{\mathsf{T}} \mathbf{P}_{f}, \tag{51}$$

which can be assembled into the global inner product matrix \mathbf{M}_1 acting on the whole mesh. The matrix \mathbf{M}_f maps the involved 1-forms to their respective tangential vectors with the help of the sharpening operator \mathbf{V}_f^\sharp , resulting in their dot product. The potential rank deficiency is mitigated through the second correction term regulated by a parameter $\lambda>0$. As for Alexa and Wardetzky, this regulation is necessary to guarantee that the inner product matrix is strictly positive definite, which can then be used as before to define the local discrete Laplace-Beltrami operator

$$\mathbf{L}_f = \mathbf{d}_f^{\mathsf{T}} \mathbf{M}_f \mathbf{d}_f. \tag{52}$$

4.3. Gradient and Divergence Operator

Since the Laplacian of function u is defined as the divergence of the gradient of said function

$$\Delta u = \operatorname{div}(\nabla u),\tag{53}$$

its discretization should be able to simulate the same behavior. This means that for each gradient matrix $\mathbf{G}_f \in \mathbb{R}^{3 \times n_f}$ defined on a polygon f, there should exist a respective divergence matrix $\mathbf{D}_f \in \mathbb{R}^{n_f \times 3}$ with

$$\mathbf{L}_f = \mathbf{D}_f \mathbf{G}_f. \tag{54}$$

Typically, this divergence operator is defined as the adjoint of the gradient scaled with a mass matrix containing the faces areas. However, a possibility for both presented approaches [AW11, dGBD20] to satisfy Equation (54) would be to follow the discrete exterior calculus interpretation [DHLM05] of the operators. Here, the difference matrix \mathbf{d}_f can be seen as a gradient operator acting on 0-forms and the divergence of a discrete 1-form on f is then defined as

$$\mathbf{D}_f := \mathbf{d}_f^\mathsf{T} \mathbf{M}_f,\tag{55}$$

which gives the required equality. Note that this interpretation of the gradient differs from de Goes' geometric operator in Equation (44). In fact, given that their sharp operator satisfies $\mathbf{V}_f^\sharp \mathbf{d}_f = \mathbf{G}_f$, we can interpret their \mathbf{L}_f as

$$|f|\mathbf{G}_f^{\mathsf{T}}\mathbf{G}_f + \lambda \mathbf{d}_f \mathbf{P}_f^{\mathsf{T}}\mathbf{P}_f \mathbf{d}_f, \tag{56}$$

which means that their stiffness matrix is composed into the "traditional" interpretation of gradient and divergence, combined with the scaled stabilization term. This is reflected in the second part of their paper, where they define the divergence of face-based vector fields as the trace of the covariant derivative. Given a vector \mathbf{u}_f associated with a face f, its divergence actually simplifies to

$$\mathbf{D}_f \mathbf{u}_f = |f| \mathbf{G}_f^\mathsf{T} \mathbf{u}_f, \tag{57}$$

leading to two interpretations of the divergence operator, one acting on 1-forms and the other on vector fields.

4.4. Differences between Inner Product Matrices

The previously presented Laplacians are closely related in their definitions of the inner product matrix for 1-forms. We will therefore shortly highlight some of the similarities and differences of the respective matrices. We already established that Alexa and Wardetzky's matrix $\tilde{\mathbf{M}}_f$ follows Brezzi et al.'s construction. $\tilde{\mathbf{M}}_f$ is dependent on the choice of origin if regarded individually, however, combined with the difference matrix \mathbf{d}_f and its adjoint \mathbf{d}_f^T , this dependency vanishes. De Goes et al.'s equivalent eliminates this dependency immediately by regarding the midpoints relative to the respective centroid of the face as $\mathbf{C}_f \in \mathbb{R}^{n_f \times 3}$, with row entries $\mathbf{c}_i = \mathbf{b}_i - \mathbf{c}_f$. However, given a planar face, combining the matrices \mathbf{B}_f^T and \mathbf{C}_f^T with \mathbf{d}_f actually yields the same result, as visualized in Figure 1. Without the respective stabilization terms, both methods would lead to identical inner products since the remaining part of de Goes et al.'s method, namely

$$-\left[\mathbf{n}_{f}\right]^{2} = \left(\mathbf{I} - \mathbf{n}_{f}\mathbf{n}_{f}^{\mathsf{T}}\right),\tag{58}$$

has no effect in this situation. Therefore, at least for planar polygons, the biggest difference between the inner product matrices are the stabilization terms.




Figure 1: Vectors involved in the inner product matrix for 1-forms for both Alexa and Wardetzky [AW11] and de Goes et al. [dGBD20] if computed on a planar polygon.

4.5. Key Outcomes

For the computer graphics community, the main achievement of the two presented polygon Laplacians was to extend the MFD based inner product stabilization from Brezzi et al. [BLS05] to possible non-planar two manifolds embedded in 3D. While the individual mathematical derivations of the operators differ, they both introduce additional weighted stabilization terms in order to guarantee the crucial requirement of strict positive definiteness of the inner product matrices, even if they are confronted with possible non-planar polygons.

5. Finite Element Discretizations

The finite element method (FEM) is often used to approximate the solution u to a given PDE on a simplicial mesh with the help of

a finite set of basis functions. The exact number depends on both the shape of the element and the order of the basis itself. In the linear case, we typically associate an individual shape function φ_i with the vertex \mathbf{x}_i , also commonly referred to as node. Now, instead of solving the PDE directly, the objective changes to finding suitable coefficients u_i , $i = 1, \dots, |\mathcal{V}|$, that approximate the unknown solution u of the PDE with

$$u(\mathbf{x}) = \sum_{i=1}^{|\mathcal{V}|} u_i \varphi_i(\mathbf{x}). \tag{59}$$

For example, a common problem solved with the finite element method is the Poisson equation $-\Delta u = f$ for a known function f. Given a surface mesh, the discretized PDE leads to a linear system $\mathbf{L}\mathbf{u} = \mathbf{f}$ with a Laplace matrix \mathbf{L} that is defined as the integrated dot product of the gradients of the basis functions:

$$\mathbf{L}_{ij} = \int_{\mathcal{M}} \langle \nabla \mathbf{\varphi}_i, \nabla \mathbf{\varphi}_j \rangle. \tag{60}$$

While a variety of different bases can be used to solve this system, for triangle meshes, we focus on linear nodal shape functions that are defined piecewise per face and satisfy the Lagrange interpolation property already mentioned in Equation (10):

$$\varphi_i(\mathbf{x}_j) = \begin{cases} 1 & \text{if } i = j, \\ 0 & \text{otherwise.} \end{cases}$$
(61)

Furthermore, we want them to satisfy additional properties within each element of the mesh in order to guarantee convergence under refinement [Hug12]:

- 1. They have to be C^1 continuous within the element and C^0 across its boundaries.
- The basis has to satisfy constant precision, which means they have to form a partition of unity

$$\sum_{i=1}^{n_f} \varphi_i(\mathbf{x}) = 1. \tag{62}$$

3. They have to fulfill the linear reproduction property

$$\sum_{i=1}^{n_f} \varphi_i(\mathbf{x}) \mathbf{x}_i = \mathbf{x} \tag{63}$$

on planar polyons.

A standard set of basis functions meeting all these requirements would be the piecewise linear hat functions on triangle meshes, also known as barycentric coordinates. For general polygons, there exist a variety of generalized barycentric coordinates (GBC) [Flo03,JSW05,JMD*07,HS08,Bis14], which are based on the idea to express any point within the polygon as weighted sum over its boundary nodes. This defines local shape functions that can be used in the finite element analysis. Extensive surveys [Flo15,CG16] have already discussed the benefits and properties of these shape functions, which were also incorporated in polyhedral finite element methods [MRS14] for volume meshes. Since this report is more focused on the explicit construction of a Laplacian operator, we will not discuss shape functions based on GBC in the same depth, but rather explain one representative case, named the harmonic coordinates. While other methods like the maximum entropy coordinates [HS08] are very present in the FEM analysis on polytopes, we still

chose the harmonic shape functions due to their numerous natural mathematical properties that makes them so well suited for FEM. This includes smoothness, non-negativity, the mean-value property and minimization of the Dirichlet energy [MKB*08, CG16]. They can also be analyzed on arbitrary convex and non-convex polygons and polyhedra [WBG07, Bis14], and in fact, the only real drawbacks of these shape functions are them not having a closed form, and therefore requiring costly numerical integration, and that they are only defined on planar elements.

5.1. Harmonic Coordinates

In this section, we will review both the construction of polygonal and polyhedral finite element shape functions based on the work of Joshi et al. [JMD*07] and Martin et al. [MKB*08]. The properties of the harmonic coordinates will be, as for the other methods, elaborated in Section 7.

5.1.1. Harmonic Shape Functions on Planar Polygon Meshes

Given a mesh \mathcal{M} consisting of arbitrary *planar* polygons \mathcal{F} , shape functions $\varphi_i^f:f\to\mathbb{R}$, defined on a polygon $f\in\mathcal{F}$, are called *harmonic* if they satisfy $\Delta\varphi_i^f=0$. In this case, they can be uniquely determined by specifying their function values b_i along the edges of the polygon as Dirichlet boundary conditions:

$$\Delta \mathbf{\phi}_{i}^{f}(\mathbf{x}) = 0 \quad \text{for } \mathbf{x} \in f$$

$$\mathbf{\phi}_{i}^{f}(\mathbf{x}) = b_{i}(\mathbf{x}) \quad \text{for } \mathbf{x} \in \partial f.$$
 (64)

In the linear case, the required Lagrange interpolation property and \mathcal{C}^0 continuity can be guaranteed by linearly interpolating the nodal values of ϕ_i^f along the boundary of the face. However, for polygons it is not possible to find a closed form for these shape functions and they have to be approximated numerically. This is why Martin et al. propose a scheme based on the method of fundamental solutions (MFS) [FK98] to determine the harmonic shape functions, although other methods are equally applicable. The core principle of MFS is to use an analytic fundamental solution ψ of the respective PDE, in our case the Laplace equation (64), and approximate the sought solution through a linear combination of ψ centered at different source points $\{\mathbf{k}_1,\dots,\mathbf{k}_n\}$ of the ambient Euclidean space. In our case, the fundamental solution to the 2D Laplace equation would be the radial basis function

$$\psi(\|\mathbf{x}\|) = \log(\|\mathbf{x}\|),\tag{65}$$

which is well defined in \mathbb{R}^2 except for one singularity at the origin. Translating this function to the previously chosen source points, we can approximate shape functions ϕ_i^f with

$$\phi_i^f(\mathbf{x}) = \sum_{j=1}^n w_{ij} \Psi(\|\mathbf{x} - \mathbf{k}_j\|), \qquad (66)$$

which are then harmonic by construction.

The $\psi_j(\mathbf{x}) := \psi(\|\mathbf{x} - \mathbf{k}_j\|)$ are also often referred to as *kernels* and have to be placed outside of the face's domain (see Figure 2), since their singularities lie at the centers \mathbf{k}_j . Martin et al. suggest a number of 3–5 kernels per edge distributed by a uniform sampling. However, in the current state, shape functions ϕ_j^f approximated via




Figure 2: Harmonic shape functions associated with the 6 nodes of a planar L-shaped polygon. The larger dots with the slight offset are the sampled center points \mathbf{k}_i and the small dots on the boundary denote the collocation points \mathbf{c}_j needed to ensure the Dirichlet boundary constraints. The figure was taken from [MKB*08].

Equation (66) would not be able to exactly reproduce linear functions, violating the linear precision property. Therefore, Martin et al. add a linear polynomial

$$\mathbf{\phi}_{i}^{f}(\mathbf{x}) = \sum_{i=1}^{n} w_{ij} \mathbf{\psi}(||\mathbf{x} - \mathbf{k}_{j}||) + \mathbf{s}_{i}^{\mathsf{T}} \mathbf{x} + r_{i}$$
 (67)

to guarantee that the function space spanned by the shape functions contains all linear functions. Linear polynomials are always harmonic, so φ_i^f still satisfies Equation (64). In order to approximate the Dirichlet boundary constraints, we select m = 3n uniformly sampled collocation points \mathbf{c}_i along the edges e_{kl} of the polygon to minimize the discretized boundary integral over the L_2 error

$$\int_{\partial f} \left| \mathbf{\phi}_i^f(\mathbf{x}) - b_i(\mathbf{x}) \right|^2 \approx \frac{1}{m} \sum_{i=1}^m \left| \mathbf{\phi}_i^f(\mathbf{c}_j) - b_i(\mathbf{c}_j) \right|^2. \tag{68}$$

This can be solved with the help of the following linear system

$$\begin{pmatrix} \psi_{11} & \cdots & \psi_{1n} & \mathbf{c}_{1}^{\mathsf{T}} & 1 \\ \vdots & & \vdots & \vdots & \vdots \\ \psi_{m1} & \cdots & \psi_{mm} & \mathbf{c}_{m}^{\mathsf{T}} & 1 \end{pmatrix} \begin{pmatrix} w_{i1} \\ \vdots \\ w_{in} \\ \mathbf{s}_{i} \\ r_{i} \end{pmatrix} = \begin{pmatrix} b_{i}(\mathbf{c}_{1}) \\ \vdots \\ b_{i}(\mathbf{c}_{m}) \end{pmatrix}, \quad (69)$$

where $\psi_{ij} = \psi(||\mathbf{c}_i - \mathbf{k}_j||)$ and $b_i(\mathbf{c}_j)$ contains the function value of the respective basis function at this point. Since the system is overdetermined (m > n + 3), it has to be solved for the least-squares solution. The authors recommend to use a QR factorization or the SVD pseudo inverse [GVL96].

5.1.2. Harmonic Shape Functions on Polyhedral Meshes

From now on, additionally to the surface case, each of the introduced methods will have a volumetric extension to polyhedral meshes. As already mentioned, polyhedra allow for a variety of simulation applications, like fracture modeling [Bis09], to be more flexible in their range of elements. However, boundary polygons in 3D are not necessarily planar and the increased connectivity between vertices lead to denser and more costly operators. Laplacians for volumetric meshes come therefore with their own individual set of challenges that have to be addressed.

The computation of a harmonic basis function for polyhedral meshes follows a similar approach as the previous section. The core principle to obtain a k-dimensional harmonic function is to impose (k-1)-dimensional harmonic coordinates as Dirichlet boundary

conditions and proceed recursively. Therefore, given a polyhedron c with n_c vertices, we first approximate 2D shape functions for each of the polyhedron's faces with the system described in the previous section. Note that this requires the boundary faces of the polyhedron to be planar. These will give us the new boundary constraints b_i^c for the respective 3D shape function $\phi_i^c: c \to \mathbb{R}$ associated to vertex v_i , with kernels and collocation points uniformly sampled over the face of the polygonal cell c. The only remaining change to the linear system in Equation (69) is that the chosen fundamental solution for the 3D Laplace equation changes to

$$\psi^{c}(\|\mathbf{x}\|) = \frac{1}{\|\mathbf{x}\|},\tag{70}$$

otherwise all steps remain the same.

5.1.3. Stiffness and Mass matrix

Equipped with the shape functions described in the previous section, we are now able to express sought solutions of a PDE with the FEM interpolation scheme as described in Equation (59). The discretizations of both stiffness and mass matrix needed for the Laplacian can be obtained through

$$(\mathbf{L}_f)_{ij} = \int_f \langle \nabla \mathbf{\varphi}_i^f, \nabla \mathbf{\varphi}_j^f \rangle \, \mathrm{d}x. \tag{71}$$

and

$$(\mathbf{M}_f)_{ij} = \int_f \mathbf{\varphi}_i^f \cdot \mathbf{\varphi}_j^f \, \mathrm{d}x. \tag{72}$$

Note that this process requires numerical integration, since the gradients of the harmonic shape functions are not constant.

5.2. Linear Virtual Refinement Method

Given the problems one has to deal with while working on general polygons, a rather pragmatic solution would be to simply refine the mesh into triangles. However, this can potentially break intended symmetry structures of the original tessellation and increase the dimension of linear systems if new vertices have to be added. The method presented by Bunge et al. [BHKB20] took inspiration from the simplicity of the triangle refinement, but proposed an inbetween approach that avoids the downsides of an explicit refinement of the mesh.




Figure 3: Spanned triangle fan on the virtual mesh after inserting the vertex v_f . The figure was taken from [BHKB20].

Given a polygon mesh \mathcal{M} , they introduce *virtual* vertices v_f inside of each (not necessarily planar) polygon f. These are expressed as affine combinations of the original faces' vertex positions

$$\mathbf{x}_f = \sum_{v_i \in f} w_i \, \mathbf{x}_i, \quad \text{with } \sum_{v_i \in f} w_i = 1.$$
 (73)

The additional vertices allow Bunge et al. to construct a virtual triangle mesh \mathcal{M}_{Δ} by dividing each face into a triangle fan as shown in Figure 3. On this mesh, standard approaches like the cotan Laplacian can be easily computed. However, in order to define operators working on the original mesh, Bunge et al. redistribute the values at the virtual vertices back to their associated polygon nodes. This is achieved by combining the affine weights $\mathbf{w}_f = (w_0, \dots, w_{n_f-1})$ of each face into a local prolongation matrix

$$\mathbf{P}_{ij}^f = \begin{cases} w_j & \text{for } i = 0\\ \delta_{ij} & \text{otherwise,} \end{cases}$$
 (74)

which can be assembled into a global matrix $\mathbf{P} \in \mathbb{R}^{(|\mathcal{V}|+|\mathcal{F}|) \times |\mathcal{V}|}$

$$\mathbf{P}_{ij} = \begin{cases} 1 & \text{if } i = j \text{ and } i \le |\mathcal{V}| \\ w_{kj} & \text{if } i = |\mathcal{V}| + k \text{ and } v_j \in f_k \\ 0 & \text{otherwise,} \end{cases}$$
 (75)

acting on the whole mesh. Using this matrix leads to a very easy refinement and coarsening process that allows Bunge et al. to define a polygon Laplacian, gradient and divergence operator on the original mesh: Given the global prolongation matrix P, they construct the cotangent mass and stiffness matrices \mathbf{M}_{Δ} and \mathbf{L}_{Δ} on the virtual triangle mesh \mathcal{M}_{Δ} (see Equation (11) and Equation (12)) and define the matrices for the original polygon mesh as

$$\mathbf{L} = \mathbf{P}^{\mathsf{T}} \mathbf{L}_{\Delta} \mathbf{P} \tag{76}$$

and

$$\mathbf{M} = \mathbf{P}^{\mathsf{T}} \mathbf{M}_{\triangle} \mathbf{P}. \tag{77}$$

As for the Laplacian, they compute the gradient and divergence operators \mathbf{G}_{Δ} and \mathbf{D}_{Δ} on \mathcal{M}_{Δ} by using the simplicial definitions in Equation (15) and (16) to express the polygon operators as

$$\mathbf{G} = \mathbf{G}_{\wedge} \mathbf{P} \tag{78}$$

and

$$\mathbf{D} = \mathbf{P}^{\mathsf{T}} \mathbf{D}_{\wedge} = \mathbf{P}^{\mathsf{T}} \mathbf{G}_{\wedge}^{\mathsf{T}} \hat{\mathbf{M}}_{\wedge}. \tag{79}$$

Combining both polygon gradient and divergence leads once again to the stiffness matrix \mathbf{L} and is therefore consistent with the previous discretization. The remaining question addressed by Bunge et al. [BHKB20] is the placement of the virtual vertex. Given that positions outside of the (planar) polygon's boundary would lead to flipped triangles with bad numerical properties, they suggest the virtual vertex to be the unique minimizer of the sum of squared triangle areas of the refined face. This is motivated by the fact that for a planar star-shaped polygon the point is guaranteed to lie within the polygon, leading to virtual triangles with positive areas. Finding the vertex position can be directly expressed as minimization problem over the weight vector $\mathbf{w}_f = (w_1, \dots, w_{n_f})^\mathsf{T} \in \mathbb{R}^{n_f}$ with

$$\mathbf{w}_f = \arg\min_{\mathbf{w}} \sum_{i=1}^{n_f} \operatorname{area} \left(\mathbf{x}_i, \mathbf{x}_{i+1}, \sum_{j=1}^{n_f} w_j \, \mathbf{x}_j \right)^2$$
(80)

such that
$$\sum_{i=1}^{n_f} w_j = 1$$
. (81)

However, for faces with valence higher than 3 this system is underconstrained and several sets of weights are able to represent the point. The authors therefore add the constraint that the weight vector should have minimal L_2 norm, which leads to a unique solution that encourages a more uniform distribution among the weights.

5.2.1. Finite Element Shape Functions

Drawing the connecting to traditional FEM methods, the previously defined prolongation weights allow Bunge et al. to define a set of local shape functions $\{\varphi_1^f,\ldots,\varphi_{n_f}^f\}$ associated with the vertices of the polygon $f\colon \text{If }\varphi_i^\Delta$ are the (n_f+1) Lagrange basis functions (see Section 3) defined on the refined polygon, one can construct coarse shape functions φ_i^f associated with the polygon nodes as

$$\varphi_i^f = \varphi_i^{\triangle} + w_i \varphi_f^{\triangle}, \quad i = 1, \dots, n_f.$$
 (82)

Here, φ_f^{\triangle} refers to the Lagrange basis function associated with the virtual vertex v_f and w_i is the respective entry in the affine weight vector \mathbf{w}_f previously used for the prolongation matrix entries. Integrating these shape functions over the polygon mesh as described in Section 5.1.3 would lead to the same discretized stiffness and mass matrices as defined in Equation (76) and Equation (77). Given their construction, Bunge et al.'s shape functions are linear within each virtual triangle and can be integrated analytically, in contrast to the harmonic shape functions, which require more expensive numerical integration.

5.2.2. Similarities to DEC

Interestingly, combining the prolongation matrix P with the standard Lagrange basis functions $\{\phi_1^\triangle,\dots\phi_{|\mathcal{V}_{\triangle}|}^\triangle\}$ defined on the refined triangle mesh allows us to reinterpret the construction of the stiffness matrix L in Equation (76) as

$$\mathbf{L} = \mathbf{d}_{\mathcal{E}}^{\mathsf{T}} \star^{1} \mathbf{d}_{\mathcal{E}},\tag{83}$$

which follows the same structure as the operators presented in Section 4. Here \star^1 denotes a polygon equivalent of the so-called *Hodge*

star operator acting on 1-forms, and the matrix $\mathbf{d}_{\mathcal{E}} \in \mathbb{R}^{|\mathcal{E}| \times |\mathcal{V}|}$ is the discrete differential operator

$$(\mathbf{d}_{\mathcal{E}})_{kl} = \begin{cases} -1 & l = i \\ 1 & l = j \\ 0 & \text{otherwise} \end{cases}$$
 (84)

taking 0-forms to 1-forms acting on edges (in contrast to the previously used coboundary operator \mathbf{d} that projects to halfedges). As in Equation (23), the indexing addresses the k-th row of the operator, this time associated with the k-th edge $e_{ij} \in \mathcal{E}$. Bunge et al. define a suitable polygon Hodge star by first constructing the respective basis functions for 1-forms: Since the coarse polygon basis functions $\{\varphi_1, \dots \varphi_{|\mathcal{V}|}\}$ are associated with the vertices of the mesh \mathcal{M} , they form a set of 0-forms and can be expressed as

$$\mathbf{\phi}_{j} = \sum_{i=1}^{|\mathcal{V}_{\Delta}|} \mathbf{P}_{ij} \mathbf{\phi}_{i}^{\Delta}. \tag{85}$$

By construction, these bases form a partition of unity. Therefore, we are able to use them to define a set of polygon Whitney bases [Whi57, AFW06] for 1-forms, with

$$\varphi_{ij} = \varphi_i \cdot \mathbf{d}_{\mathcal{E}} \varphi_j - \varphi_j \cdot \mathbf{d}_{\mathcal{E}} \varphi_i = \sum_{k,l} \mathbf{P}_{ki} \mathbf{P}_{lj} \varphi_{kl}^{\triangle}, \quad k < l,$$
 (86)

being a 1-form associated to the polygon edge $e_{ij} \in \mathcal{E}$. In order to define a prolongation operator that maps 1-forms from polygon edges to edges on the refined triangle mesh, Bunge et al. define a second prolongation matrix $\mathbf{P}^1 \in \mathbb{R}^{|\mathcal{E}_{\Delta}| \times |\mathcal{E}|}$ as

$$\mathbf{P}_{(ij)(kl)}^{1} = \mathbf{P}_{ik}\mathbf{P}_{jl},\tag{87}$$

with (ij) indicating the row associated to the edge $e_{ij}^{\Delta} \in \mathcal{E}_{\Delta}$ on the refined mesh and (kl) the index of the respective coarse polygon edge $e_{kl} \in \mathcal{E}$. This matrix can be combined with the discrete Hodge star \star_{Δ}^{1} on the refined triangle mesh, giving us

$$\mathbf{M}_1 = \star^1 = \left(\mathbf{P}^1\right)^\mathsf{T} \star^1_{\Delta} \mathbf{P}^1 \tag{88}$$

and

$$\mathbf{L} = \mathbf{d}_{\mathcal{E}}^{\mathsf{T}} \left(\mathbf{P}^{1} \right)^{\mathsf{T}} \star_{\Delta}^{1} \mathbf{P}^{1} \mathbf{d}_{\mathcal{E}}. \tag{89}$$

The question is if this inner product matrix \mathbf{M}_1 satisfies the same desiderata as for example the matrices presented by Alexa and Wardetzky and de Goes et al. [AW11, dGBD20], which remains to be investigated.

5.2.3. Laplacian on Volume Meshes

The previously described method can be intuitively extended to arbitrary polyhedral meshes, but instead of virtual triangles, the mesh \mathcal{M} will be refined into virtual tetrahedra. The first steps are analogous to the surface case, meaning that all faces $f \in \mathcal{F}$ of a given polyhedron $c \in \mathcal{C}$ are refined into triangles with virtual vertices placed at the point that minimizes the sum of squared triangle areas (see Equation (80)). To span the virtual tetrahedra, Bunge et al. [BBA21] introduce an additional vertex \mathbf{x}_c inside of each cell, which is, similar to the surface case, the affine combination of the original cells' vertex positions

$$\mathbf{x}_c = \sum_{v_i \in c} w_i \, \mathbf{x}_i, \quad \text{with } \sum_{v_i \in c} w_i = 1.$$
 (90)

The position of \mathbf{x}_{c} is defined as the minimizer of the sum of squared tetrahedron volumes

$$\sum_{t_{ik} \in \partial c} \operatorname{vol}\left(\mathbf{x}_{i}, \mathbf{x}_{j}, \mathbf{x}_{k}, \mathbf{x}_{c}\right)^{2}, \tag{91}$$

with t_{ijk} being the refined triangles along the cell's boundary. As for surfaces, this minimization problem can be expressed with respect to a set of affine weights $\mathbf{w}_c \in \mathbb{R}^{n_c}$ and assembled into a local prolongation matrix \mathbf{P}^c . The only real difference of this approach is that the global prolongation \mathbf{P} is now divided into a two-step process, with the "surface" prolongation matrix \mathbf{P}_F inserting the virtual face points for all $f \in \mathcal{F}$ and \mathbf{P}_C the cell points for all $c \in \mathcal{C}$, respectively, giving us

$$\mathbf{P} = \mathbf{P}_C \mathbf{P}_F. \tag{92}$$

The polyhedral stiffness and mass matrix are then obtained as in (76) and (77), with the slight change that the refined matrices are the volumetric discretizations of the cotan formula [AHKSH20, Cra19].

5.3. Key Outcomes

One of the main benefits of the presented FEM methods, in contrast to the operators described in the Mimetic Polygon Laplacian section, is that they both can be applied to surface as well as volume meshes. However, the harmonic shape functions are restricted to planar polygons and boundary faces, while the linear virtual refinement method is able to deal with non-planar elements. Still, the extension to volume meshes leads to a larger flexibility for the computer graphics community and its range of applications. Furthermore, besides being able to construct all the operators we already described, having explicit shape functions allows us to interpolate any given function within the polytopes if we know its values at the vertex positions. In relation to the MFD operators, since the virtual refinement method allows for a reinterpretation of the Laplacian in the same inner product structure, future analysis could further investigate the relation between FEM and MFD approaches and their different qualities.

6. Finite Volume Discretizations

The finite volume method (FV) was originally introduced by Dusinberre [Dus55, Dus61] for the heat equation and can be used on all differential equations that can be expressed through the divergence operator. It follows the idea that the integral of a differential over a small volume can be expressed as a surface integral of the fluxes over the boundary of the same cell [Rap17]. As the MFD, finite volume discretizations can be considered mimetic since they try to enforce balance equations for mass, momentum, and energy on each cell [LMS14], conservation properties that make them well suited for fluid mechanic problems. However, the basic derivation of the 2D Laplace operator with FV assumes a Delaunay triangle mesh, more specifically orthogonal dual and primal edges, in order to prevent negative coefficients. To avoid this restriction, Bunge et al. [BBA21] used a special polygonal variant of the FV, called Discrete Duality Finite Volume (DDFV) [Her00, Her09, DO05, CH11] and combined this technique with their previously described virtual triangle refinement to define a gradient, divergence and Laplacian operator for polygonal and polyhedral meshes.

6.1. Discrete Duality Finite Volume




Figure 4: A 2D DDFV diamond cell spanned between the primal edge $\mathbf{x}_1, \mathbf{x}_2$ and the virtual dual vertices $\mathbf{x}_l, \mathbf{x}_r$. The vectors $\mathbf{e}_{ij} \perp$ are orthogonal to the diamond edges and involved construction of the gradient operator. The figure was taken from [BBA21].

We will shortly revisit the definition of a 2D gradient operator constructed with the DDFV approach. Given a planar polygonal surface mesh \mathcal{M} , we consider a second set of vertices, called *dual* vertices \mathcal{V}^* , associated with the barycenter of each face $f \in \mathcal{F}$. For each edge $e \in \mathcal{E}$, they are able to span a so-called *diamond* cell D, consisting of the vertex pair v_1, v_2 connected by e and the dual vertices v_l, v_r associated to the faces adjacent to the edge (see Figure 4). The diamond cell always forms a rectangular shape with edge vectors $\mathbf{e}_{ij} = \mathbf{x}_j - \mathbf{x}_i$ in \mathbb{R}^2 assigned to the edge tuples $(i, j) \in D$. On these diamonds, the DDFV method uses Stokes' theorem in order to define a local gradient for a function u in the following way

$$\iint_{D} \nabla u(\mathbf{x}) \, d\mathbf{x} = \int_{\partial D} u(\mathbf{x}) \, \mathbf{n}(\mathbf{x}) \, d\mathbf{x}$$

$$= \sum_{(i,j) \in \partial D} \frac{\mathbf{e}_{ij}^{\perp}}{\|\mathbf{e}_{ij}\|} \int_{0}^{1} \|\mathbf{e}_{ij}\| \left((1-t)u_{i} + tu_{j} \right) \, dt$$
 (94)

 $= \sum_{(i,j)\in\partial D} \mathbf{e}_{ij}^{\perp} \frac{u_i + u_j}{2}.$ (95)

Here u_i denotes the function values associated to the vertex v_i and $\mathbf{n}(\mathbf{x}) \in \mathbb{R}^2$ is an outward pointing normal vector at point \mathbf{x} along the boundary of the diamond. Therefore, the gradient operator can be solely expressed through the four outward rotated edge vectors of the respective diamond. One of the many benefits of the DDFV method is the discrete duality property between its discrete gradient and divergence operators, also known as Green's "integration-by-parts" formulas [ABHK12, LMS14]. This property is an essential part of the finite volume setting.

6.2. Diamond Laplace for Surface Meshes

Bunge et al. [BBA21] adapt the previously defined DDFV gradient operator in two ways to extend it to polygon surface meshes embedded in 3D:

- First, they reduce the systems' dimension by expressing the values at the dual vertices as affine combinations of the original primal vertices with the help of the previously introduced face prolongation matrix P (see Equation (75)). As in Section 5.2, the position of the dual vertices is the minimizer of the sum of squared triangle areas of the refined face.
- Second, they define an *intrinsic* gradient operator associated with the (not necessarily planar) diamond cells, allowing them to directly apply the formula defined in Equation (95).

Given a diamond cell D with vertices (v_1, v_2, v_l, v_r) embedded in \mathbb{R}^3 , the first objective is to isometrically unfold the planar triangles along their shared edge into a plane. The new 2D coordinates can then be used to construct the diamonds gradient operator $\mathbf{G}_D \in \mathbb{R}^{2 \times 4}$. For each column i associated with a vertex it is defined as

$$\mathbf{G}_{D}(:,i) = \frac{1}{2|D|} \sum_{(i,j)\in\partial D} \tilde{\mathbf{e}}_{ij}^{\perp},\tag{96}$$

where |D| denotes the diamond's area and $\tilde{\mathbf{e}}_{ij}^{\perp} \in \mathbb{R}^2$ orthogonal vectors to the intrinsic 2D diamond edges. These local gradient matrices are then assembled into a global operator $\mathbf{G}_{\diamond} \in \mathbb{R}^{2|\mathcal{E}|\times(|\mathcal{V}|+|\mathcal{F}|)}$ defined on the refined triangle mesh \mathcal{M}_{\triangle} . Combined with the surface prolongation matrix \mathbf{P} (see Equation (75)), we obtain a gradient operator for the original polygon mesh through

$$\mathbf{G} = \mathbf{G}_{\diamond} \mathbf{P}.\tag{97}$$

This operator maps function values u_i associated with the *primal* vertices $v_i \in \mathcal{V}$ to intrinsic gradient vectors $\nabla u|_D \in \mathbb{R}^2$ associated to the diamond cells spanned on the virtual triangle mesh \mathcal{M}_{Δ} . Following the DDFV discretization of the divergence, Bunge et al. [BBA21] define their diamond divergence operator as

$$\mathbf{D} = \mathbf{P}^{\mathsf{T}} \mathbf{G}_{\diamond}^{\mathsf{T}} \hat{\mathbf{M}}_{\diamond} \tag{98}$$

where $\hat{\mathbf{M}}_{\diamond} \in \mathbb{R}^{2|\mathcal{E}| \times 2|\mathcal{E}|}$ is a diagonal matrix containing the diamond D_i 's area $|D_i|$ in its diagonal entries with indices 2i and 2i+1. The final stiffness matrix is then directly derived from its definition as the divergence of the gradient and given by

$$\mathbf{L} = \mathbf{D}\mathbf{G} = \mathbf{P}^{\mathsf{T}} \mathbf{G}_{\diamond}^{\mathsf{T}} \hat{\mathbf{M}}_{\diamond} \mathbf{G}_{\diamond} \mathbf{P}, \tag{99}$$

mapping from vertices to vertices. The diamond version of the mass matrix required for the strong formulation $\mathbb L$ of the Laplacian is defined as

$$\mathbf{M} = \mathbf{P}^{\mathsf{T}} \mathbf{M}_{\diamond} \mathbf{P}. \tag{100}$$

It is derived from the standard DDFV diagonal mass matrix $\mathbf{M}_{\diamond} \in \mathbb{R}^{(|\mathcal{V}|+|\mathcal{F}|)\times(|\mathcal{V}|+|\mathcal{F}|)}$ that distributes the diamond areas to the primal and dual vertices:

$$(\mathbf{M}_{\diamond})_{ii} = \begin{cases} \sum_{D \ni \nu_i} \frac{|D|}{4} & \text{if } \nu_i \in \mathcal{V} \\ \sum_{D \ni \nu_i} \frac{|D|}{4} & \text{if } \nu_i \in \mathcal{V}^* \\ 0 & \text{otherwise.} \end{cases}$$
(101)

6.3. Diamond Laplace for Volume Meshes

As in Section 5.2.3, Bunge et al. [BBA21] define a Laplacian operator for general polyhedra by refining the given mesh \mathcal{M} into a virtual tetrahedral mesh \mathcal{M}_{\triangle} . However, as for the surface case,




Figure 5: A minimal diamond associated with the primal edge $\mathbf{x}_1, \mathbf{x}_2$ on the face f with virtual face vertex \mathbf{x}_f . The virtual cell vertices \mathbf{x}_l and \mathbf{x}_r of the adjacent polyhedra form the respective tips of the diamond. The figure was taken from [BBA21].

they once again interpret the added virtual cell vertices as the required dual vertices \mathcal{V}^* in order to divide the mesh into volumetric diamond cells \mathcal{D} . Since the refinement divides the original mesh into virtual tetrahedra, they can consider any combination of cells $c_{\Delta} \in \mathcal{C}_{\Delta}$ as a region Ω bounded by a triangulated surface with n_c^{Δ} vertices. Therefore, Bunge et al. [BBA21] can once again discretize the gradient of a function u over Ω with the help of Stokes' theorem:

$$\iiint_{\Omega} \nabla u(\mathbf{x}) \, d\mathbf{x} = \iint_{\partial \Omega} u(\mathbf{x}) \mathbf{n}(\mathbf{x}) \, d\mathbf{x}$$

$$= \sum_{t_{i:k} \in \partial \Omega} \frac{\mathbf{a}_{ijk}}{\|\mathbf{a}_{ijk}\|} \int_{0}^{1} \int_{0}^{t} \|\mathbf{a}_{ijk}\| \left((1 - s - t)u_{i} + su_{j} + tu_{k} \right) \, ds \, dt$$
(102)

$$= \sum_{t_{ijk} \in \partial \Omega} \mathbf{a}_{ijk} \frac{u_i + u_j + u_k}{3},\tag{104}$$

where

$$\mathbf{a}_{ijk} = \frac{1}{2} (\mathbf{x}_j - \mathbf{x}_i) \times (\mathbf{x}_k - \mathbf{x}_i)$$
 (105)

denotes the outward pointing face normal of the boundary triangle t_{ijk} whose magnitude equals $|t_{ijk}|$. Therefore, the column-wise matrix representation of ∇u over Ω can be written as

$$\mathbf{G}_{\Omega}(:,i) = \frac{1}{3|\Omega|} \sum_{t_{ijk} \in \partial \Omega} \mathbf{a}_{ijk} \in \mathbb{R}^{3 \times n_c^{\Delta}}, \tag{106}$$

which is consistent with the 2D discretization (see Equation (96)). The only remaining question is how to define suitable volumetric diamond cells. Here, Bunge et al. define a so called *minimal* diamond consisting of two adjacent virtual tetrahedra. The tips are formed by the virtual cell vertices v_l and v_r of the adjacent polyhedra and its base triangle $(\mathbf{x}_f, \mathbf{x}_i, \mathbf{x}_j)$ is defined by a shared edge e_{ij} and its connection to the virtual face vertex v_f of the shared face f (see Figure 5). This seems unintuitive on the first glance, since the larger region spanned by all edges of f connected to v_l and v_f equally forms an integrable region independent of the faces surface. However, the authors point out that this choice for the diamond cell could lead to *spurious modes*, which describes a Laplacian with a kernel that contains more than constant functions and can cause severe numerical artifacts. Spurious modes are a known limitation to some DDFV methods like [Her09], as discussed by [ABH13].

The focus on the null space of a discrete operator and avoiding numerically polluting modes is also a very important aspect of the MFD method [LMS14] and, as previously discussed, motivate the stabilization terms of the inner products introduced in the works of [AW11] and [dGBD20] explained in Section 4.1.2 and Section 4.2.2. Using Equation (106), Bunge et al. define a local gradient $\mathbf{G}_D \in \mathbb{R}^{3\times 5}$ per minimal diamond cell D that can be assembled into a global gradient matrix \mathbf{G}_{\Diamond} defined on the refined mesh. Combined with the volume prolongation matrix \mathbf{P} defined in Equation (92) we get a polyhedral gradient operator

$$\mathbf{G} = \mathbf{G}_{\diamond} \mathbf{P},\tag{107}$$

its compatible divergence operator

$$\mathbf{D} = \mathbf{P}^{\mathsf{T}} \mathbf{G}_{\diamond} \hat{\mathbf{M}}_{\diamond}, \tag{108}$$

with $\hat{\mathbf{M}}_{\diamond}$ being a diagonal matrix containing the diamond volumes, and finally the generalized stiffness matrix

$$\mathbf{L} = \mathbf{DG}.\tag{109}$$

The mass matrix M is obtained as in the surface case:

$$\mathbf{M} = \mathbf{P}^{\mathsf{T}} \mathbf{M}_{\diamond} \mathbf{P},\tag{110}$$

but with M_{\diamond} now distributing the volumes of the minimal diamonds among the involved vertices and being defined as

$$(\mathbf{M}_{\diamond})_{ii} = \begin{cases} \sum_{D \ni v_i} \frac{|D|}{6} & \text{if } v_i \in \mathcal{V} \\ \sum_{D \ni v_i} \frac{|D|}{6} & \text{if } v_i \in \mathcal{V}_{\Delta} \setminus (\mathcal{V} \cup \mathcal{V}^*) \\ \sum_{D \ni v_i} \frac{|D|}{4} & \text{if } v_i \in \mathcal{V}^* \\ 0 & \text{otherwise.} \end{cases}$$
(111)

6.4. Key Outcomes

(103)

As for the FEM methods, the diamond Laplacian can be applied to both surface and volume meshes with possible non-planar faces. In contrast to the previous operators, the influence of the DDFV background causes its focus to lie more on the construction of a plausible gradient and divergence operator, which can both be constructed intrinsically. The diamond structure combined with the prolongation steps leads to a larger local neighborhood, which can yield more accurate results (see Section 8), but also causes denser and therefore more costly system matrices.

7. Properties of the Polygon Laplacians

In this section, we analyze each of the previously introduced polygon and polyhedral Laplacians based on the properties established by Wardetzky et al. [WMKG07] (see Section 2.1). Since all methods fail to satisfy the maximum principle, but are otherwise able to retain the remaining properties, we will structure the upcoming section accordingly. Therefore, this section will focus more on notable differences within the derivations and proofs of the individual properties instead of differences between the actual operators themselves.

7.1. Symmetry

Each of the presented Laplace operators fulfills symmetry by construction. As the products of individual symmetric or diagonal matrices, the respective inner product matrices \mathbf{M}_f introduced in both [AW11] and [dGBD20] are symmetric as well. Therefore, given that the local stiffness matrix is defined as $\mathbf{d}_f^\mathsf{T} \mathbf{M}_f \mathbf{d}_f$, it and the globally assembled weak form fulfill this property.

Since the FEM stiffness matrix is defined as the integrated dot product of the shape functions' gradients, the property follows naturally for the operators introduced by [MKB*08] and [BHKB20].

In case of the diamond Laplacian, it follows from the definition of the weak form as

$$\mathbf{L} = \mathbf{D}\mathbf{G} = \mathbf{P}^{\mathsf{T}}\mathbf{G}_{\diamond}^{\mathsf{T}}\hat{\mathbf{M}}_{\diamond}\mathbf{G}_{\diamond}\mathbf{P} \tag{112}$$

and $\hat{\mathbf{M}}_{\diamond}$ being a diagonal matrix.

7.2. Locality

All methods, with the exception of [BBA21], define their involved matrices or shape functions locally per polygon or polyhedron. This implies that their respective influence is restricted to the boundary of the individual elements. Therefore, the stencil of the Laplacian associated with a single vertex v_i involves all face/cell vertices of the polygons/polyhedrons where v_i itself is a part of, which leads to a local neighborhood. However, the diamond Laplacian has a larger stencil than the other operators. Since the diamond structure connects adjacent cells on the refined mesh and the prolongation process distributes values at virtual vertices back to all original face/cell nodes, its neighborhood for a vertex v_i consists of the same vertices as the other methods, and additionally those that are part of a cell/face sharing a face/edge with the primitives surrounding v_i .

7.3. Linear Precision.

In contrast to the previous two properties, linear precision does not automatically follow from each operators construction and must be proven individually.

Alexa and Wardetzky. For the Laplacian introduced by Alexa and Wardetzky, similarly to the cotan Laplacian, the proof is based on the area gradient of the polygon with respect to its vertices. Consider the vertex v_i to lie in a planar neighborhood. Starting with Equation (7), we have to focus on two terms in order to show linear precision for Alexa and Wardetzky's operator:

$$\tilde{\mathbf{L}}_f \mathbf{X}_f = \mathbf{d}_f^\mathsf{T} \tilde{\mathbf{M}}_f \mathbf{d}_f \mathbf{X}_f, \tag{113}$$

where

$$\tilde{\mathbf{L}}_f := \mathbf{d}_f^{\mathsf{T}} \tilde{\mathbf{M}}_f \mathbf{d}_f \tag{114}$$

with $\tilde{\mathbf{M}}_f$ being the inner product matrix defined by Brezzi et al. [BLS05] (see Equation (27)), and

$$\mathbf{d}_{f}^{\mathsf{T}} \mathbf{C}_{\bar{f}} \mathbf{U}_{\bar{f}} \mathbf{C}_{\bar{f}}^{\mathsf{T}} \mathbf{d}_{f} \mathbf{X}_{f}. \tag{115}$$

As shown in Equation (29), the latter term vanishes for planar polygons, leaving us with the remaining part $\tilde{\mathbf{L}}_f \mathbf{X}_f$. As shown in

Lemma 3 in the original paper, the *i*-th row of this matrix is equivalent to the polygon's area gradient at vertex v_i :

$$\nabla_{\mathbf{x}_i} |f| = (\tilde{\mathbf{L}}_f \mathbf{X}_f)_i. \tag{116}$$

Therefore, the expression $(\mathbf{LX})_i$ is equal to the sum over the area gradients of the adjacent faces with respect to the vertex v_i . Given that the neighborhood is planar, this sum becomes zero since moving the vertex in any direction in the plane would leave the area unchanged.

De Goes et al. For de Goes et al.'s Laplacian [dGBD20], we proceed in the same fashion as for Alexa and Wardetzky and consider the individual terms of the inner product matrix, starting with the projection:

$$\mathbf{P}_f \mathbf{d}_f \mathbf{X}_f = \mathbf{P}_f \mathbf{E}_f. \tag{117}$$

As mentioned by the authors, \mathbf{P}_f actually eliminates all discrete 1-forms in the image of

$$\mathbf{V}_{f}^{\flat} = \mathbf{E}_{f} \left(\mathbf{I} - \mathbf{n}_{f} \mathbf{n}_{f}^{\mathsf{T}} \right). \tag{118}$$

Therefore, the projection term vanishes if applied to \mathbf{E}_f . As described in Section 4.4, since the vertex v_i is surrounded by planar polygons, the remaining inner product term is equal to $\tilde{\mathbf{L}}_f \mathbf{X}_f$ for each individual face f, allowing for the same area gradient interpretation.

Harmonic Coordinates. In the finite element theory, a common practice is to ensure that shape functions pass the so-called *patch test*, which verifies if they are able to fulfill the linear precision property we defined in Equation (63). A variant of the requirements the shape functions have to meet in order to pass the patch test are the exact same as our definition of the linear precision property for Laplacians [ZTZ13]. Therefore, given that the harmonic shape functions are linear precise, Martin et al.'s Laplacian satisfies this property as well. In fact, as discussed by the authors in the original paper, the linear polynomial introduced in Equation (67) is crucial to guarantee *exact* linear precision, and therefore this property, independent of the number of chosen kernels.

Linear Virtual Refinement Method. For volume meshes, the linear precision property is satisfied if for all linear functions **u** sampled on the mesh, the Laplacian **Lu** is exact at the interior vertices of the mesh [AHKSH20]. As for surfaces, an equivalent expression can be formulated as

$$(\mathbf{LX})_i = 0, \tag{119}$$

which has to be satisfied for all interior vertices v_i . For surface meshes, given that the elements surrounding the interior vertex v_i are planar, the refined triangles of these primitives are planar as well, since the position of the virtual vertex is an affine combination of the existing face vertices. The cotangent Laplacian has linear precision, so any linear function \mathbf{u} sampled at the vertices and prolonged to the refined mesh $\mathbf{u}_{\triangle} = \mathbf{P}\mathbf{u}$ satisfies

$$(\mathbf{L}_{\Delta}\mathbf{u}_{\Delta})_{i} = 0 \tag{120}$$

for the interior vertex v_i and all virtual vertices of its surrounding faces. These are exactly the values on the refined mesh that account

for the value of the polygon Laplacian at v_i , since each value associated to the virtual vertices is redistributed to the original nodes of the mesh by applying \mathbf{P}^{T} to $\mathbf{L}_{\Delta}\mathbf{u}_{\Delta}$. Them all being zero gives us $(\mathbf{L}\mathbf{u})_i = 0$. Given that the cotan Laplacian for volume meshes also satisfies linear precision, the same arguments apply for polyhedral meshes.

Diamond Laplacian. Knowing that the DDFV Laplacian $\mathbf{G}_{\diamond}^{\mathsf{T}}\hat{\mathbf{M}}_{\diamond}\mathbf{G}_{\diamond}$ satisfies linear precision on the refined mesh [DO05, Her09, CLB*09], applying the full-rank prolongation matrices preserves this property.

7.4. Positive Semi-Definiteness and Null Space

For Martin et al.'s and Bunge et al.'s operators [BHKB20, MKB*08], given that their Laplacians follow the standard FEM approach, the respective stiffness matrices fulfill both properties by construction and do not require individual proofs.

In case of Alexa and Wardetzky [AW11] and de Goes et al. [dGBD20], the strict positive definiteness of their respective inner product matrices \mathbf{M}_1 is a fundamental building block in their derivation process, which leads to a kernel that contains only the zero vector. Furthermore, given its construction, the kernel of the coboundary operator \mathbf{d} contains only constant functions. Combining these two matrices into $\mathbf{d}^T\mathbf{M}_1\mathbf{d}$ therefore yields a positive semi-definite stiffness matrix with a one-dimensional kernel consisting of constant functions.

For the diamond Laplacian, the diagonal matrix $\hat{\mathbf{M}}_{\diamond}$ is symmetric positive definite for both surface and volume meshes. The prolongation matrix P has full rank and therefore the constructed stiffness matrix is also positive semi-definite. However, the dimension of the null space requires further explanation. While it is obvious that constant functions, given its definition, lie in the kernel of the gradient, it remains to be shown that they are the only ones that do. As mentioned by Bunge et al. [BBA21], both the gradient of a minimal diamond and a 2D diamond cell can be interpreted as the gradient of an affine function fitted to the function values of the edge midpoints of the respective cell. The gradient will therefore vanish if all function values associated to the midpoints are identical. However, this can only be satisfied if the function values at the dual and primal vertices of the respective diamond are identical as well. Furthermore, since the diamonds share the function values with their adjacent cells along the common boundary element, this requirement propagates through the complete mesh, leaving only room for constant functions.

7.5. Maximum Principle

As previously mentioned, all of the presented Laplacians are not able to fulfill the maximum principle for general meshes. In case of the Diamond Laplacian, failing to satisfy the maximum principle is a known limitation of the DDFV scheme [QSGBC18], which can not be rectified by applying the prolongation matrices. All other methods reproduce the cotan Laplacian on triangle meshes, which is also not able to retain this property as discussed in Section 3.




Figure 6: Effect of the number of chosen kernel and collocation points on the convergence behavior of the harmonic shape functions on the Voronoi plane (left) and hexagon sphere (right). The shown L_2 errors refer to the Poisson systems solved for Franke's test function on planar grids and for the sphercial harmonic function Y_2^3 on unit spheres respectively.

8. Evaluation

In this section, we compare the performance of the presented Laplace operators in a number of different computer graphics applications for both surface and volume meshes. We are interested in the influence of the respective parameters λ described by Alexa and Wardetzky [AW11] and de Goes et al. [dGBD20] and how they affect the quality of the inner product matrix. Therefore, we analyze a selection of values besides the recommended choices of the authors. Concerning the placement of the virtual vertices, we follow the recommendations of Bunge et al. [BHKB20, BBA21] and use the squared triangle area and squared tetrahedra volume minimizer, respectively. For the harmonic shape functions [MKB*08], we noticed that the number of chosen kernels and control points strongly affects the results on our chosen test meshes. We analyzed different numbers of kernels with m = 4n collocation points instead of the recommended ratio of m = 3n from the original paper, since it yielded slightly more accurate results in our setting. Based on this evaluation, we increased the number of edge kernel/collocation points for surface meshes to 20/90 with a constant offset of $\xi = 1e^{-3}$ and used the recommended 3/9 points per edge and 10/30 per face with an offset of $\xi = 1e^{-2}$ for the volumetric tessellations. The choice was also influenced by the numerical costs involved in using more samples, explaining the lower sample sizes for volume meshes. The triangles and tetrahedra used for the numerical integration are the same as the virtual elements used for the virtual refinement method. Given that the integration of the shape functions is not exact, using a more elaborate tessellation technique could further improve the results.

8.1. Poisson Equation

We analyze the convergence behavior of the different Laplacians by solving the Poisson equation $-\Delta u = f$ with Dirichlet boundary conditions on various progressively refined tessellations of the unit

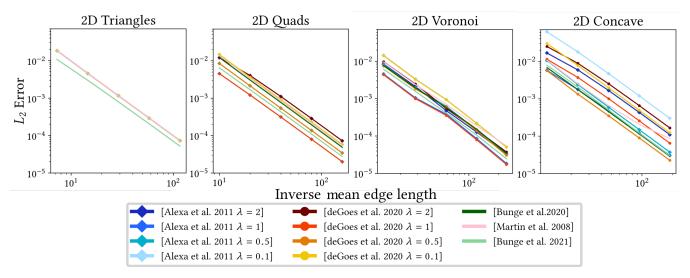


Figure 7: L_2 error in log-log scale of the Poisson system solved for Franke's test function on planar grids with triangles (left), quads (center left), Voronoi cells (center right), and concave faces (right). Since all methods, with the exception of the Diamond Laplace, are equivalent to the cotangent Laplacian on triangle meshes, the lines overlap in the leftmost plot.

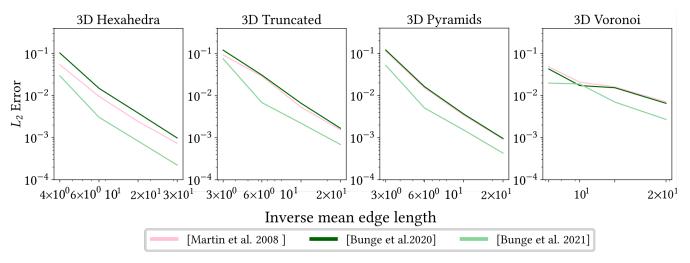


Figure 8: L_2 error in log-log scale of the Poisson system solved for Franke's test function on unit cubes tessellated with hexahedra (left), pyramids (center left), truncated cells (center right), and Voronoi cells (right).

square and cube. We chose the 2D and 3D Franke test functions [Fra79] for the right hand side f and solve the discrete system

$$\mathbf{L}\mathbf{u} = \mathbf{M}\mathbf{b},\tag{121}$$

with $\mathbf{b} \in \mathbb{R}^{|\mathcal{V}|}$ containing the values of the analytic Laplacian Δf of the respective test function sampled at the vertices. The solution \mathbf{u} is then compared to the analytic values of f. The exact formulas of the Franke test functions are

$$f_{2D}(x,y) = \frac{3}{4}e^{-\frac{(9x-2)^2+(9y-2)^2}{4}} + \frac{3}{4}e^{-\frac{(9x+1)^2}{49} - \frac{9y+1}{10}} + \frac{1}{2}e^{-\frac{(9x-7)^2+(9y-3)^2}{4}} - \frac{1}{5}e^{-(9x-4)^2-(9y-7)^2}$$
(122)

and

$$f_{3D}(x,y,z) = \frac{3}{4}e^{-\frac{(9x-2)^2 + (9y-2)^2 + (9z-2)^2}{4}} + \frac{3}{4}e^{-\frac{(9x+1)^2}{49} - \frac{9y+1}{10} - \frac{9z+1}{10}} + \frac{1}{10}e^{-\frac{(9x-7)^2 + (9y-3)^2 + (9z-5)^2}{4}} - \frac{1}{5}e^{-(9x-4)^2 - (9y-7)^2 - (9z-5)^2}.$$
(123)

Figure 7 displays the L_2 error rates of the solved Franke Poisson system on different surface meshes. Each Laplacian is able to reproduce the expected quadratic convergence rate on all tessellations. Regarding the accuracy, both operators presented by Alexa

and Wardetzky [AW11] and de Goes et al. [dGBD20] are able to produce high quality results for $\lambda = 1$ on quad and Voronoi meshes, while de Goes et al. with parameter $\lambda = 0.5$ yields the lowest errors on concave faces, closely followed by the operator presented by Bunge et al. [BHKB20]. The Diamond Laplacian is also able to consistently produce low error rates and, being the only operator that is not reduced to the cotangent Laplacian for triangles, yields the best results for the triangle grid. Figure 8 shows the error rates for the volumetric case. As before, the Diamond Laplacian is the most accurate, while both methods from Bunge et al. [BHKB20] and Martin et al. [MKB*08] yield qualitatively similar results. However, the harmonic shape functions are very expensive due to the solving process involved in their construction, especially for volume meshes, while the method from Bunge et al. [BHKB20] is the fastest (see Section 8.5).

8.2. Spherical Harmonics

The eigenfunctions of the Laplacian on the unit sphere S^2 are called the spherical harmonics $Y_l^m: S^2 \to \mathbb{R}$ with eigenvalues -l(l+1). Using the fact that Y_l^m are eigenfunctions, we can solve for $\mathbf{u} \in \mathbb{R}^{|\mathcal{V}|}$:

$$\mathbf{u} = \mathbf{M}^{-1} \mathbf{L} \mathbf{y}_{l}^{m} \tag{124}$$

$$\mathbf{u} = \mathbf{M}^{-1} \mathbf{L} \mathbf{y}_{l}^{m}$$

$$\Leftrightarrow \mathbf{M} \mathbf{u} = \mathbf{L} \mathbf{y}_{l}^{m}$$
(124)

and rescale the solution with the respective eigenvalue. The entries of $\mathbf{y}_l^m \in \mathbb{R}^{|\mathcal{V}|}$ denote the function values of Y_l^m sampled at the vertices. We can measure the error of \mathbf{u} being an eigenfunction to the presented Laplace operators by evaluating

$$\left\| \mathbf{y}_l^m + \frac{1}{l(l+1)} \mathbf{u} \right\|_{\mathbf{M}}^2 \tag{126}$$

for a selected frequency with non-zero eigenvalue. The L^2 norm is computed with respect to the inner product induced by the mass matrix M.

Figure 9 displays the deviation of the solution from the analytic function values of

$$Y_2^3(x, y, z) = \frac{1}{4} \sqrt{\frac{105}{\pi}} (x^2 - y^2) z$$
 (127)

with eigenvalue -12. The method presented by Bunge et al. [BHKB20] is able to yield some of the lowest error rates especially for hexagons, while the harmonic shape functions yield very good results on the concave tessellation, which are only surpassed by the Diamond Laplacian. As for the operators presented by Alexa and Wardetzky and de Goes et al., choosing lower λ for the stabilization term leads to the most accurate results, with $\lambda = 0.5$ being one of the most consistent options. The effect of chosen sample points on the harmonic shape functions and their possible numerical artefacts can be observed in Figure 6. We analyzed different kernel/collocation point samples for both the Franke as well as the spherical harmonics Poisson solve and observed the expected behavior of lower kernel numbers influencing both error and convergence rate.

8.3. Eigenvalues and Eigenmodes

Given that the spherical harmonics have an analytic expression for their eigenvalues, we can solve the generalized eigenvalue problem

$$\mathbf{L}\mathbf{u} = \tilde{\lambda}\mathbf{M}\mathbf{u} \tag{128}$$

for the eigenvalues $\tilde{\lambda}$ of the discrete Laplacians and compare them to the analytic values.

Similarly, given the volumetric unit 3-ball \mathcal{B}^3 , the eigenfunctions u and eigenvalues λ of the Laplacian can be obtained with the help of the Helmholtz equation:

$$\Delta u = -\lambda u \text{ in } \mathcal{B}^3 \tag{129}$$

s.t.
$$u = 0$$
 on $\partial \mathcal{B}^3$. (130)

The discrete solution can be expressed by the spherical Bessel functions, which allows us to solve the same generalized eigenvalue problem as in Equation (128) with the stiffness and mass matrix obtained on a polyhedral tessellation of \mathcal{B}^3 .

Figure 10 shows the first eigenvalues of each polygon Laplacian obtained on different spherical meshes. A value of $\lambda = 1$ leads to very accurate results for both Alexa and Wardetzky's and de Goes et al.'s operators. Using smaller values for the parameter leads to larger eigenvalues, while higher λ yield results that are lower than the correct solution. The other methods lead to relatively similar deviations with eigenvalues that display the expected "stair-like" appearance, but are too large in the higher frequencies. The highest and lowest values for λ start to loose the stair-like pattern for the eigenvalues. Figure 11 shows the results for the eigenvalues on the unit ball, where the Diamond Laplacian has the most accurate results, but all methods display the desired constant eigenvalues for the respective frequencies, with only slight deviations.

8.4. Geodesics in Heat

In order to assess the quality of the divergence and gradient operators discussed in this survey, we evaluate them in the context of the geodesics in heat method presented by Crane et al. [CWW13]. Given the *i*-th unit vector $\mathbf{e}_i \in \mathbb{R}^{|\mathcal{V}|}$, we can obtain the geodesic distances from a vertex v_i to all other vertices in the mesh in three steps: First we solve the heat flow with a fixed small time-step ε for the vector $\mathbf{u} \in \mathbb{R}^{|\mathcal{V}|}$:

$$(\mathbf{I} - \varepsilon \mathbb{L})\mathbf{u} = \mathbf{e}_i$$

$$\Leftrightarrow (\mathbf{M} - \varepsilon \mathbf{L})\mathbf{u} = \mathbf{M}\mathbf{e}_i.$$
(131)

Then we compute the normalized gradients of the solution vector through

$$\mathbf{g}_{j} = \frac{(\mathbf{G}\mathbf{u})_{j}}{\|(\mathbf{G}\mathbf{u})_{j}\|}.$$
 (132)

In the last step, we solve the Poisson equation

$$\mathbf{L}\mathbf{v} = \mathbf{D}\mathbf{g} \tag{133}$$

for the geodesic distances $\mathbf{v} \in \mathbb{R}^{|\mathcal{V}|}$ and relocate the solution by the offset of the value associated with vertex v_i to zero. Note that, depending on the employed Laplacian, the number and dimension of the gradient vectors vary. For example, the methods introduced by

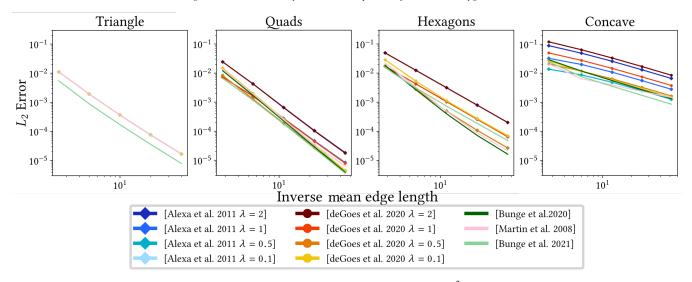


Figure 9: L_2 error in log-log scale for the Poisson solve of the spherical harmonic function Y_2^3 with eigenvalue -12 on different tessellations of the unit sphere consisting of triangles (left), quads (center left), hexagons (center right) and concave faces (right). All methods, except the Diamond Laplace, are equivalent to the cotangent Laplacian on triangles. This leads to the overlapping lines on the triangle sphere.

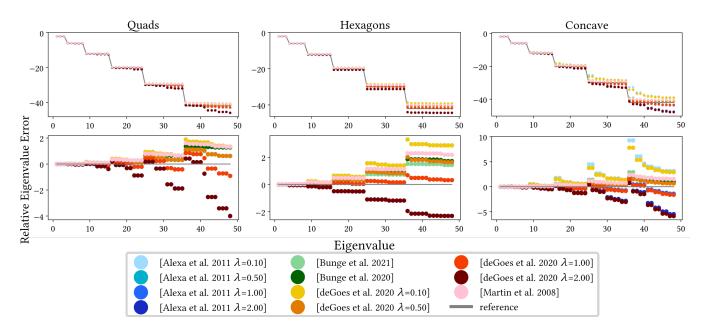


Figure 10: The smallest 48 non-zero eigenvalues of the Laplacian on different unit spheres with quads (left), hexagons (center) and concave faces (right). The individual top plots shows the computed eigenvalues and the lower ones the relative deviation from the ground truth.




Figure 11: The smallest 34 non-zero eigenvalues of the Laplacian on two unit balls consisting of hexhedra (left) and truncated cells (right). The individual top plots shows the computed eigenvalues and the lower ones the relative deviation from the ground truth.

Alexa and Wardetzky and de Goes et al. [AW11, dGBD20] obtain three-dimensional gradient vectors per polygon face, while Bunge et al. [BHKB20] associate their gradient vectors with the virtual triangles, so one per halfedge of the original mesh. On the other hand, the Diamond gradient operator [BBA21] leads to intrinsic two-dimensional gradients that are associated with the virtual diamond cells and therefore with the edges of the original mesh. Additionally, the normalization step in Equation (132) differs depending on the chosen method. While all methods with a geometrically motivated gradient can normalize the vectors with their respective Euclidean length, the method by Alexa and Wardetzky [AW11] needs an alternative approach. As pointed out by Crane et al. [CWW13], interpreting the coboundary operator d as gradient leads to discrete 1-forms associated with the halfedges, which cannot be directly normalized. However, since M_1 (see Equation (28)) gives us an inner product matrix for 1-forms, they propose to use

$$\|\nabla u\|_f = \sqrt{\frac{\mathbf{u}_f^\mathsf{T} \mathbf{L}_f \mathbf{u}_f}{|f|}} \tag{134}$$

as normalization term by assuming that ∇u is constant over each face and therefore

$$\mathbf{u}_{f}^{\mathsf{T}} \mathbf{L}_{f} \mathbf{u}_{f} = \int_{f} \left\| \nabla u \right\|^{2} dA = \left\| \nabla u \right\|^{2} \left| f \right|. \tag{135}$$

The time step ε involved in the first step of the heat method (131) is a debated subject. As pointed out by Crane et al. [CWW13], the discrete setting does not follow the expected rule that smaller time steps necessarily lead to more accurate results. However, too large time steps lead to a smoothed approximation of the distances. We therefore compare the behavior of the two most common choices:

- The squared mean edge length of the mesh, as proposed by Crane et al. [CWW13] and used in Bunge et al. [BHKB20].
- The squared length of the longest face diagonal, as suggested by de Goes et al. [dGBD20, dGDMD16].

Figure 12 and 13 show the deviation of the obtained geodesic distances to the Euclidean distance in the plane and the great-

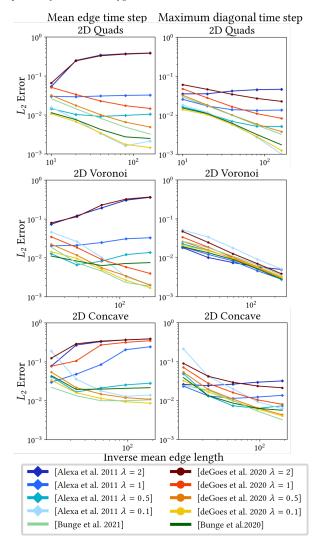


Figure 12: L_2 error in log-log scale of the Geodesics in heat method on planar grids with quads (top), concave polygons (center) and Voronoi faces (bottom). For each progressively refined mesh the selected vertex was the one with the least norm to the center of the plane.

circle distance on the unit sphere. Using the mean edge length as time step leads to larger error fluctuations for the methods introduced by Alexa and Wardetzky and de Goes et al., especially for progressively larger λ , while the Laplacians by Bunge et al. [BHKB20, BBA21] remain relatively unaffected. Using the maximum face diagonal stabilizes these deviations, but negatively affects the accuracy for several of the presented methods on some of the test meshes. In general, both the Diamond Laplace and de Goes et al.'s method for $\lambda=0.1$ have the lowest error rates, independent of the chosen time step. Additionally, the definition of a geometric gradient operator greatly improves the accuracy of de Goes et al.'s method in comparison to the algebraic coboundary operator used for Alexa and Wardetzky's Laplacian. However, choosing larger values for λ affects both methods negatively. Still, given that λ con-

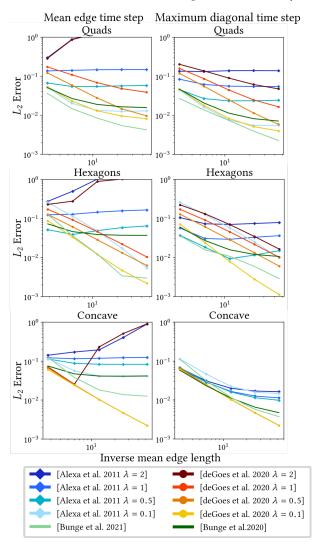


Figure 13: L^2 error in log-log scale of the Geodesics in heat method on unit spheres with quad (top), hexagon (center) and concave faces (bottom).

trols the influence of the stabilization term for both methods, it can not be chosen to be indefinitely close to zero, since this would lead to Laplacians with too large kernels and therefore spurious modes.

8.5. Timings and Sparsity

In this section, we compare different statistics involved in the solving process of a Poisson problem for both 2D and 3D meshes. Table 1 lists the respective timings to construct the stiffness matrix (build), the number of its non-zero entries (nnz), and the time it takes to solve the system (solve) with Eigen's SimplicialLLT solver [GJ*10]. The timings were measured on a standard workstation with a six-core Intel Xeon 3.6 GHz CPU. As discussed in the locality property section, all Laplacians, with the exception of the Diamond Laplace, have the same sparsity pattern for their matrices, leading to roughly the same solving times. However, while the

implementation of the respective methods has not been extensively optimized for efficiency, it is very apparent that the construction time of the harmonic shape functions by Martin et al. [MKB*08] exceeds the other operators by a tremendous amount. Especially for volume meshes, the time it takes to build the involved matrices makes the method not competitive, since the final results are on par with Bunge et al.'s [BHKB20] operator and do not justify the large costs.

8.6. Mesh quality

An interesting sub-case of polygonal meshes are those with nonplanar polygons. They are in general more challenging than planar faces due to their twisted surfaces, but still occur frequently in both surface and volume computer graphic models. So far, we have only considered meshes with planar polygons in order to establish an intuition of the general effectiveness of each operator. However, in order to evaluate this more challenging setting of non-planar faces, we still have to retain a mesh with a known analytic solution to the given problem. We therefore added noise in tangential direction to the vertex positions of the previously mentioned hexagon spheres and projected them back onto the unit sphere. While this results in non-planar faces, note that the added noise also leads less balanced hexagonal shapes. Equipped with these new test meshes, we repeat the spherical harmonics convergence test (see Figure 14). In general, each of the evaluated operators displays a higher error rate and slower convergence for the non-planar sphere, with the Laplacians presented by Bunge et al. [BHKB20, BBA21] leading to the smallest errors. In contrast to the planar case, choosing a lower hyperparameter λ for the operators of Alexa and Wardetzky [AW11] and de Goes et al. [dGBD20] leads to better results. Similar tendencies can be observed if we add progressively stronger noise to the faces of a single mesh, as depicted in Figure 15. All operators display higher errors for increasingly twisted faces, but in this setting, choosing the same hyperparameter $\lambda = 0.5$ as in the planar case leads to the lowest rates for the works presented by Alexa and Wardetzky and de Goes et al.. However, with increasing non-planarity the error converges to similar values as for $\lambda = 0.1$, which appears to be more stable. As in the other test, the operators presented by Bunge et al. lead to the lowest errors. The harmonic shape functions presented by Martin et al. [MKB*08] were not included in these evaluations, since their definition only holds for planar polygons.

Another aspect in which the underlying tessellation may directly affect the quality of the operators is the shape of the faces itself. For example, Delaunay triangles lead to more favorable results and properties for the Laplacian than meshes consisting of less ideal triangulations [HKA15]. A possible way to quantify the stability of the operator with respect to the given tessellation is to analyze its condition number κ . It is defined as the ratio

$$\kappa = \frac{\lambda_{max}}{\lambda_{min}} \tag{136}$$

of the Laplacians largest and smallest non-zero eigenvalues λ_{max} and λ_{min} . Note that the actual smallest eigenvalue would be zero, since the Laplacian has a one-dimensional kernel. The condition number gives us a notion about the numerical quality of the stiffness and mass matrices and the operators potential to quickly converge to the correct solution of a given problem [KFS13]. We there-

Mesh	$ \mathcal{V} $	[MKB*08]	[AW11]	[dGBD20]	[BHKB20]	[BBA21]
		build nnz solve				
Quads 2D	26k	92s 231k 8ms	44ms 231k 8ms	47ms 231k 8ms	10ms 231k 8ms	43ms 537k 21ms
Voronoi 2D	51k	78s 616k 25ms	94ms 616k 25ms	76ms 616k 25ms	29ms 616k 25ms	224ms 1723k 74ms
Hexahedra 3D	4913	465s 117k 3ms			190ms 117k 3ms	250ms 333k 6ms
Voronoi 3D	5183	482s 324k 5ms			140ms 324k 5ms	280ms 1497k 11ms

Table 1: Different statistics involved in the solution process of a Poisson problem with the presented polygon Laplacians.

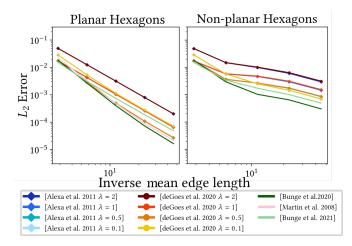


Figure 14: L_2 error in log-log scale for the Poisson solve of the spherical harmonic function Y_2^3 with eigenvalue -12 on planar and non-planar hexagons. The non-planar elements affect both the convergence rate and accuracy of all methods. The harmonic shape functions are not included in this experiment, since their definition only holds for planar polygons.

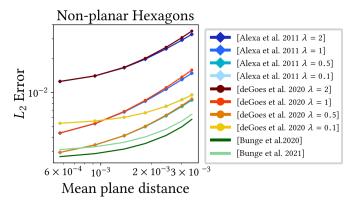


Figure 15: L_2 error in log-log scale for the Poisson solve of the spherical harmonic function Y_2^3 on progressively non-planar hexagons. We added different magnitudes of tangential noise to the initial faces and projected the vertices back onto the unit sphere. In order to measure the "non-planarity" of the polygons, the x-axis depicts the mean distance of the face vertices to a fitted plane.




Figure 16: Condition numbers (Equation (136)) of the different Laplace operators on an initially uniform quad plane. One edge within the grid is progressively shortened, resulting in four faces to become more and more distorted with each iteration. The diminishing quality of the polygons lead to higher condition numbers for most of the operators.

fore evaluate the effect of decreasing polygon quality on the different Laplacians by continuously collapsing a single edge of the previously considered quad plane, while measuring its effect on their respective condition numbers. The results can be seen in Figure 16. In general, all of the presented operators are not really affected by the first rounds of edge distortion. However, with the edge length converging closer to zero, the condition numbers of the Laplacians presented by Bunge et al. [BHKB20, BBA21] begin to rise significantly due to the diminishing triangle quality of the virtual refinements. The numerical stability of the operators presented by Martin et al. [MKB*08] and de Goes et al. [dGBD20] also decreases, but with a lower magnitude. In contrast, the Laplacian presented by Alexa and Wardetzky [AW11] is not affected by the diminishing edge length and only slightly increases for the smallest hyperparameter $\lambda = 0.1$. However, both operators presented by Alexa and Wardetzky and de Goes et al. follow the pattern that a higher λ leads to generally larger condition numbers.

9. Summary and Recommendation

In light of the above, we want to summarize the presented results and give the reader a recommendation in which situation which operator should be used. Given their overall performance, the Laplacians presented by Alexa and Wardetzky and de Goes et al. lead to very favorable numerical results if the user is willing to adjust the stabilization parameter λ . Furthermore, de Goes et al. provide a list of other operators that go hand in hand with the matrices introduced in this paper and lead to a larger variety of problems that can be handled with their method.

If the reader is looking for a method that works both on surface and volume meshes and leads to accurate results without any adjusting, the Diamond Laplacian would be their method of choice. However, given its denser matrix pattern, this approach leads to longer solving times.

If this is a problem, a computationally more efficient but slightly less accurate choice would be the operator presented by Bunge et al. [BHKB20]. It works on both surface and volume meshes and, given that many applications already work with the cotangent Laplacian, can be easily integrated since the only missing piece is the prolongation matrix.

The harmonic shape functions are not competitive in comparison to the other methods due to their costly construction process. However, they are able to reproduce P1 and Q1 elements on triangles and quads, are C^0 continuous to P1/Q1 at the boundaries of polygons and polyhedra, and can therefore be seamlessly mixed with these standard elements.

10. Conclusion and Outlook

In this survey we attempted to give a comprehensive description of the recent progress made within the graphics community to construct general polygonal and polyhedral Laplace operators. By highlighting the numerical schemes used for the respective Laplacians, we provide context for the individual discretization strategies and motivate the problems involved in their generalization process. Furthermore, we analyzed the properties of each individual Laplacian and investigated similarities and parallels between the presented methods. As a second aspect of the survey, we introduced a variety of discrete gradient and divergence operators and explain the relationship to their associated Laplacian. Finally, we provide a list of quantitative comparisons between the presented operators that highlight their individual strengths and weaknesses, while simultaneously addressing reoccurring debates within the original papers. The source code for these tests and the construction of the individual operators will be made publicly available.

We hope that this survey helps to motivate the usage of more general tessellations within the graphics community, given that the necessary tools for many applications are already there. In fact, there exist a vast variety of methods that can be used on general polygon and polyhedral meshes that exceeded the scope of this paper. For example, higher order shape functions play an important role in the finite element theory if higher accuracy and faster convergence of a system's solution is needed. Several methods for generalized higher order shape functions [RGB11, SDG*19, BHSH*22] or the volumetric VEM extension by Beirao et al. [BdVDR17] extend these benefits to general polygon and polyhedral meshes. Furthermore, besides the Laplacian, there exist a variety of other discrete differential operators that could be useful to the graphics community, as

touched upon by de Goes et al. [dGBD20] and [LMS14] in their survey on the MFD method.

Acknowledgements

The authors would like to thank the anonymous reviewers for all the valuable comments and suggestions, which helped to improve the quality of this survey. We are also grateful to Philipp Herholz for his help and support during the whole project. Thank you to Olga Sorkine-Hornung, Marc Alexa and Misha Kazhdan for all the valuable discussions about polygon shape functions and their properties. Finally, we are grateful to Fernando de Goes, Marc Alexa and Max Wardetzky for providing feedback on the implementation of the respective Laplacians. Open Access funding enabled and organized by Projekt DEAL.

References

- [ABH13] ANDREIANOV B., BENDAHMANE M., HUBERT F.: On 3D DDFV discretization of gradient and divergence operators. II. Discrete functional analysis tools and applications to degenerate parabolic problems. Computational Methods in Applied Mathematics 13, 4 (2013), pp. 369–410. 13
- [ABHK12] ANDREIANOV B., BENDAHMANE M., HUBERT F., KRELL S.: On 3D DDFV discretization of gradient and divergence operators. I. Meshing, operators and discrete duality. *IMA Journal of Numerical Analysis* 32, 4 (2012), pp.1574–1603. 12
- [AFW06] ARNOLD D. N., FALK R. S., WINTHER R.: Finite element exterior calculus, homological techniques, and applications. Acta Numerica 15 (2006), 1–155. 11
- [AHKSH20] ALEXA M., HERHOLZ P., KOHLBRENNER M., SORKINE-HORNUNG O.: Properties of Laplace operators for tetrahedral meshes. *Computer Graphics Forum 39*, 5 (2020). 2, 11, 14
- [AW11] ALEXA M., WARDETZKY M.: Discrete Laplacians on general polygonal meshes. ACM Transactions on Graphics 30, 4 (2011), 102:1– 102:10. 4, 7, 11, 13, 14, 15, 17, 19, 20, 21
- [BBA21] BUNGE A., BOTSCH M., ALEXA M.: The diamond laplace for polygonal and polyhedral meshes. *Computer Graphics Forum 40*, 5 (2021), 217–230. 11, 12, 13, 14, 15, 19, 20, 21
- [BdVBM13] BEIRÃO DA VEIGA L., BREZZI F., MARINI L. D.: Virtual elements for linear elasticity problems. SIAM J. Numer. Anal. 51, 2 (2013), 794–812. 5, 6
- [BdVDR17] BEIRÃO DA VEIGA L., DASSI F., RUSSO A.: High-order virtual element method on polyhedral meshes. Computers and Mathematics with Applications 74 (2017), 1110–1122. 22
- [BHKB20] BUNGE A., HERHOLZ P., KAZHDAN M., BOTSCH M.: Polygon Laplacian made simple. *Computer Graphics Forum 39*, 2 (2020), 303–313. 9, 10, 14, 15, 17, 19, 20, 21, 22
- [BHSH*22] BUNGE A., HERHOLZ P., SORKINE-HORNUNG O., BOTSCH M., KAZHDAN M.: Variational quadratic shape functions for polygons and polyhedra. ACM Trans. Graph. 41, 4 (2022). 22
- [Bis09] BISHOP J.: Simulating the pervasive fracture of materials and structures using randomly close packed Voronoi tessellations. *Computational Mechanics* 44, 4 (2009), 455–471. 1, 9
- [Bis14] BISHOP J.: A displacement-based finite element formulation for general polyhedra using harmonic shape functions. *International Journal* for Numerical Methods in Engineering 97 (2014), 1–31. 8
- [BLS05] BREZZI F., LIPNIKOV K., SIMONCINI V.: A family of mimetic finite difference methods on polygonal and polyhedral meshes. *Mathe-matical Models and Methods in Applied Sciences* 15, 10 (2005), 1533– 1551. 4, 5, 7, 14

- [BLSS07] BREZZI F., LIPNIKOV K., SHASHKOV M., SIMONCINI V.: A new discretization methodology for diffusion problems on generalized polyhedral meshes. Computer Methods in Applied Mechanics and Engineering 196, 37 (2007), 3682–3692. 4
- [BSPG06] BOTSCH M., SUMNER R., PAULY M., GROSS M.: Deformation transfer for detail-preserving surface editing. In *Proc. of Vision*, *Modeling and Visualization* (2006), pp. 357–364. 3
- [CG16] CHEN R., GOTSMAN C.: On pseudo-harmonic barycentric coordinates. Computer Aided Geometric Design 44 (2016), 15–35. 8
- [CH11] COUDIÈRE Y., HUBERT F.: A 3D discrete duality finite volume method for nonlinear elliptic equations. SIAM J. Sci. Comput. 33, 4 (2011), 1739–1764. 11
- [CLB*09] CHUANG M., LUO L., BROWN B. J., RUSINKIEWICZ S., KAZHDAN M.: Estimating the Laplace-Beltrami operator by restricting 3d functions. Computer Graphics Forum 28, 5 (2009), 1475–1484.
- [Cra19] CRANE K.: The n-dimensional cotangent formula. https://www.cs.cmu.edu/~kmcrane/Projects/Other/ nDCotanFormula.pdf, 2019. 11
- [CWW13] CRANE K., WEISCHEDEL C., WARDETZKY M.: Geodesics in heat: A new approach to computing distance based on heat flow. ACM Transactions on Graphics 32, 5 (2013), 152:1–152:11. 17, 19
- [dGBD20] DE GOES F., BUTTS A., DESBRUN M.: Discrete differential operators on polygonal meshes. ACM Transactions on Graphics 39, 4 (2020), 110:1–110:14. 5, 6, 7, 11, 13, 14, 15, 17, 19, 20, 21, 22
- [dGDMD16] DE GOES F., DESBRUN M., MEYER M., DEROSE T.: Subdivision exterior calculus for geometry processing. ACM Transactions on Graphics 35, 4 (2016), 133:1–133:11. 19
- [DHLM05] DESBRUN M., HIRANI A. N., LEOK M., MARSDEN J. E.: Discrete exterior calculus. arXiv: Differential Geometry (2005). 7
- [DMSB99] DESBRUN M., MEYER M., SCHRÖDER P., BARR A. H.: Implicit fairing of irregular meshes using diffusion and curvature flow. In *Proceedings of ACM SIGGRAPH* (1999), pp. 317–324. 1, 3, 4
- [DO05] DOMELEVO K., OMNÉS P.: A finite volume method for the Laplace equation on almost arbitrary two-dimensional grids. *Math. Model. Numer. Anal. (M2AN) 39*, 6 (2005), 1203–1249. 11, 15
- [Dus55] DUSINBERRE G. M.: Heat transfer calculations by numerical methods. *Journal of the American Society for Naval Engineers* 67, 4 (1955), 991–1002. 11
- [Dus61] DUSINBERRE G.: Heat-transfer Calculations by Finite Differences. International textbooks in mechanical engineering. International Textbook Company, 1961. 11
- [Dzi88] DZIUK G.: Finite Elements for the Beltrami operator on arbitrary surfaces. In *Partial Differential Equations and Calculus of Variations* (1988), Hildebrandt S., Leis R., (Eds.), Springer Berlin Heidelberg, pp. 142–155. 1
- [FK98] FAIRWEATHER G., KARAGEORGHIS A.: The method of fundamental solutions for elliptic boundary value problems. Advances in Computational Mathematics 9, 1 (1998), 69–95. 8
- [FI003] FLOATER M. S.: Mean value coordinates. Computer Aided Geometric Design 20, 1 (2003), 19–27. 8
- [Flo15] FLOATER M. S.: Generalized barycentric coordinates and applications. Acta Numerica 24 (2015), 161–214. 8
- [Fra79] FRANKE R.: A critical comparison of some methods for interpolation of scattered data. Tech. rep., Naval Postgraduate School, 1979.
- [GJ*10] GUENNEBAUD G., JACOB B., ET AL.: Eigen v3. http://eigen.tuxfamily.org, 2010. 20
- [GVL96] GOLUB G. H., VAN LOAN C. F.: Matrix Computations. Johns Hopkins Studies in the Mathematical Sciences. Johns Hopkins University Press, 1996. 9

- [Her00] HERMELINE F.: A finite volume method for the approximation of diffusion operators on distorted meshes. J. Comput. Phys. 160, 2 (2000), 481–499. 11
- [Her09] HERMELINE F.: A finite volume method for approximating 3D diffusion operators on general meshes. J. Comput. Phys. 228, 16 (2009), 5763–5786. 11, 13, 15
- [HKA15] HERHOLZ P., KYPRIANIDIS J. E., ALEXA M.: Perfect Laplacians for polygon meshes. Computer Graphics Forum 34, 5 (2015), 211–218. 20
- [HPW06] HILDEBRANDT K., POLTHIER K., WARDETZKY M.: On the convergence of metric and geometric properties of polyhedral surfaces. *Geometriae Dedicata 123* (2006), 89–112. 3, 4
- [HS08] HORMANN K., SUKUMAR N.: Maximum entropy coordinates for arbitrary polytopes. Computer Graphics Forum 27, 5 (2008), 1513–1520. 8
- [Hug12] HUGHES T.: The Finite Element Method: Linear Static and Dynamic Finite Element Analysis. Dover Civil and Mechanical Engineering. Dover Publications, 2012. 8
- [JMD*07] JOSHI P., MEYER M., DEROSE T., GREEN B., SANOCKI T.: Harmonic coordinates for character articulation. ACM Trans. Graph. 26, 3 (2007), 71–81. 8
- [JSW05] JU T., SCHAEFER S., WARREN J.: Mean value coordinates for closed triangular meshes. ACM Transactions on Graphics 24, 3 (2005), 561–566. 8
- [KFS13] KRISHNAN D., FATTAL R., SZELISKI R.: Efficient preconditioning of laplacian matrices for computer graphics. ACM Transactions on Graphics 32, 4 (2013). 20
- [Lee97] LEE J.: Riemannian Manifolds: An Introduction to Curvature. Graduate Texts in Mathematics. Springer New York, 1997. 6
- [LMS14] LIPNIKOV K., MANZINI G., SHASHKOV M.: Mimetic finite difference method. *Journal of Computational Physics* 257 (2014), 1163– 1227. 4, 11, 12, 13, 22
- [Mac49] MACNEAL R.: The Solution of Partial Differential Equations by Means of Electrical Networks. PhD thesis, California Institute of Technology, 1949. 3
- [MDSB03] MEYER M., DESBRUN M., SCHRÖDER P., BARR A. H.: Discrete differential-geometry operators for triangulated 2-manifolds. In *Visualization and Mathematics III*, Hege H.-C., Polthier K., (Eds.). Springer-Verlag, 2003, pp. 35–57. 1
- [MKB*08] MARTIN S., KAUFMANN P., BOTSCH M., WICKE M., GROSS M.: Polyhedral finite elements using harmonic basis functions. Computer Graphics Forum 27, 5 (2008), 1521–1529. 8, 9, 14, 15, 17, 20, 21
- [MRS14] MANZINI G., RUSSO A., SUKUMAR N.: New perspectives on polygonal and polyhedral finite element methods. *Mathematical Models* and Methods in Applied Sciences 24 (2014), 1665–1699.
- [OSTLY12] OOI E. T., SONG C., TIN-LOI F., YANG Z.: Polygon scaled boundary finite elements for crack propagation modelling. *International Journal for Numerical Methods in Engineering 91*, 3 (2012), 319–342.
- [PP93] PINKALL U., POLTHIER K.: Computing discrete minimal surfaces and their conjugates. Experim. Math. 2 (1993), 15–36. 1, 3
- [QSGBC18] QUENJEL E. H., SAAD M., GHILANI M., BESSEMOULIN-CHATARD M.: Convergence of a monotone nonlinear DDFV scheme for degenerate parabolic equations. *HAL* (2018). 15
- [Rap17] RAPP B. E.: Chapter 31 finite volume method. In Microfluidics: Modelling, Mechanics and Mathematics, Micro and Nano Technologies. Elsevier, Oxford, 2017, pp. 633–654. 11
- [RGB11] RAND A., GILLETTE A., BAJAJ C.: Quadratic serendipity finite elements on polygons using generalized barycentric coordinates. *Mathematics of Computation 83* (2011). 22
- [Ros97] ROSENBERG S.: The Laplacian on a Riemannian Manifold. London Mathematical Society Student Texts. Cambridge University Press, 1997, pp. 1–51. 4

- [SDG*19] SCHNEIDER T., DUMAS J., GAO X., BOTSCH M., PANOZZO D., ZORIN D.: Poly-spline finite-element method. ACM Transactions on Graphics 38, 3 (2019), 19:1–19:16. 22
- [Sha21] SHARP N.: Intrinsic Triangulations in Geometry Processing. 3
- [TS06] TABARRAEI A., SUKUMAR N.: Application of polygonal finite elements in linear elasticity. *International Journal of Computational Methods* 03 (2006), 503–520.
- [TS08] TABARRAEI A., SUKUMAR N.: Extended finite element method on polygonal and quadtree meshes. Computer Methods in Applied Mechanics and Engineering 197 (2008), 425–438. 1
- [War08] WARDETZKY M.: Convergence of the Cotangent Formula: An Overview. Birkhäuser Basel, Basel, 2008, pp. 275–286. 3, 4
- [WBG07] WICKE M., BOTSCH M., GROSS M.: A finite element method on convex polyhedra. Computer Graphics Forum 26, 3 (2007), 355–364.
- [Whi57] WHITNEY H.: Geometric Integration Theory. Princeton University Press, 1957. 11
- [WMKG07] WARDETZKY M., MATHUR S., KÄLBERER F., GRINSPUN E.: Discrete Laplace operators: No free lunch. In *Proceedings of Euro-graphics Symposium on Geometry Processing* (2007), pp. 33–37. 1, 2, 13
- [ZTZ13] ZIENKIEWICZ O., TAYLOR R., ZHU J.: Chapter 8 the patch test, reduced integration, and nonconforming elements. In *The Finite Element Method: its Basis and Fundamentals*, Zienkiewicz O., Taylor R., Zhu J., (Eds.), 7th edition ed. Butterworth-Heinemann, Oxford, 2013, pp. 257–284. 14